

05-31-00

A

05/30/00
1639 U.S. PTO

Please type a plus sign (+) inside this box → ☐

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 678-495 (P9204)

First Inventor or Application Identifier Yu-Suk YUN et al.

Title APPARATUS AND METHOD FOR GATED...

Express Mail Label No. EL484186489US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 41]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 27]
4. Oath or Declaration [Total Pages 2]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S).
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement filed in prior application,
Statement(s) Status still proper and desired
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	Paul J. Farrell, Esq.				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	5/30/00

CERTIFICATION UNDER 37 C.F.R. § 1.10 I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484186489US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Dated: May 30, 2000

Micael J. Musella

09/584046

05/30/00



PATENT
Atty. Docket No. 678-495 (P9204)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner for Patents
Washington, D.C. 20231



UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Yu-Suk YUN et al.
For: APPARATUS AND METHOD FOR GATED TRANSMISSION IN CDMA
COMMUNICATION SYSTEM

Enclosed are:

- [x] 38 page(s) of specification
- [x] 1 page(s) of Abstract
- [x] 2 page(s) of claims
- [x] 27 sheets of drawings [X] formal [] informal
- [x] 2 page(s) of Declaration and Power of Attorney
- [x] An Assignment of the invention to Samsung Electronics Co., Ltd.

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date May 30, 2000 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484186489US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231



Michael J. Musella

☐ This application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application(s) No(s):

APPLICATION NO(S): FILING DATE

____/____/____

____/____/____

☒ Certified copy of application

Country

Appln. No.

Filed

KOREA

1999-19647

29/05/1999

from which priority under Title 35 United States Code, § 119

is claimed

☐ is enclosed.

☒ will follow.

CALCULATION OF APPLICATION FEE*

For	Number Filed	Number Extra	Rate	Basic Fee \$690.00
Total Claims**	6 - 20 = 0		x \$ 18.00	\$ 0.00
Independent Claims	3 - 3 = 0		x \$ 78.00	\$ 0.00
Multiple <input type="checkbox"/> yes	Add'l. Fee		\$260.00	\$
Dependent Claims <input checked="" type="checkbox"/> no	Add'l. Fee	None	=	\$

TOTAL \$690.00


*Based upon accompanying Preliminary Amendment

**Includes all independent and single dependent claims and all claims referred to in multiple claims.

See 37 C.F.R. § 1.75(c).

- ☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. § 1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$_____.
- ☒ The amount of \$40.00 for recording the attached Assignment is enclosed as a separate check.
- ☒ A check in the amount of \$690.00 to cover the
[] recording, [x] filing fee(s) is attached.
- ☐ Charge fee to Deposit Account No. 04-1121. Order No. _____
TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.
- ☒ Please charge any deficiency as well as any other fee(s) which may become due under 37 C.F.R. § 1.16 and 1.17, at any time during the pendency of this application, or credit any overpayment of such fee(s) to Deposit Account No. 04-1121. Also, in the event any extensions of time for responding are required for the pending application(s), please treat this paper as a petition to extend the time as required and charge Deposit Account No. 04-1121 therefor. TWO (2) COPIES OF THIS SHEET ARE ENCLOSED.

Date: May 30, 2000


Paul J. Farrell
Reg. No. 33,494

DILWORTH & BARRESE, LLP
333 Earle Ovington Blvd.
Uniondale, NY 11553
Tel. No. (516) 228-8484
Fax. No. (516) 228-8516

PJF/KCE/gm

APPARATUS AND METHOD FOR GATED TRANSMISSION
IN CDMA COMMUNICATION SYSTEM

PRIORITY

5

This application claims priority to an application entitled "Apparatus and Method for Gated Transmission in CDMA Communication System" filed in the Korean Industrial Property Office on May 29, 1999 and assigned Serial No. 99-19647, the contents of which are hereby incorporated by reference.

10

BACKGROUND OF THE INVENTION

1. Field of the Invention

15

The present invention relates generally to a CDMA mobile communication system, and in particular, to an apparatus and method for gated transmission that assigns channels and does not require a separate resynchronization process.

2. Description of the Related Art

20

A conventional CDMA (Code Division Multiple Access) mobile communication system primarily provides voice services. However, the future CDMA mobile communication system will support the IMT-2000 standard, which provides a high-speed data service as well as the voice service. More specifically, the IMT-2000 standard provides a high-quality voice service, a moving picture service, and an Internet search service.

In a mobile communication system, a data communication service typically alternates between a transmission of burst data period and a long non-transmission periods. The bursts of data are referred to as “packets” or “packages” of data. In the next generation communication systems, traffic data is transmitted over a dedicated traffic channel for a data transmission duration, and the dedicated traffic channel is maintained for a predetermined time even when a base station and a mobile station have no traffic data to transmit. The mobile communication system transmits the traffic data over the dedicated traffic channel for the data transmission duration and maintains the dedicated traffic channel between the base station and the mobile station for a predetermined time even when there is no traffic data to transmit in order to minimize a time delay due to sync reacquisition when there is traffic data to transmit.

The invention will be described with reference to a UTRA (UMTS (Universal Mobile Telecommunications System) Terrestrial Radio Access) mobile communication system. Such a mobile communication system requires many states according to channel assignment circumstances and the existence/nonexistence of state information in order to provide a packet data service as well as a voice service.

FIG. 1A shows state transition in the cell connected state of the mobile communication system. Referring to FIG. 1A, the cell connected state includes a paging channel (PCH) state, a random access channel (RACH)/downlink shared channel (DSCH) state, a RACH/forward link access channel (FACH) state, and a dedicated channel (DCH)/DCH, DCH/DCH+DSCH, DCH/DSCH+DSCH Ctrl (Control Channel) state.

FIG. 1B shows a user data active substate and a control-only substate of the

DCH/DCH, DCH/DCH+DSCH, DCH/DSCH+DSCH Ctrl state. It should be noted that the novel gated transmission device and method is applied to a state where there is no traffic data to transmit for a predetermined time (e.g., DCH/DCH control-only substate).

5

The existing CDMA mobile communication system which mainly provides the voice service releases a channel after completion of data transmission and connects the channel again when there is further data to transmit. However, in providing the packet data service as well as the voice service, the conventional data transmission method has many delaying factors such as a reconnection delay, thus making it difficult to provide a high-quality service. Therefore, to provide the packet data service as well as the voice service, an improved data transmission method is required. For example, in many cases, data transmission is performed intermittently for Internet access and file downloading. Thus, there are transmission and non-transmission periods. During the non-transmission period, the conventional data transmission method releases or maintains the traffic (or data) channel(DPDCH OR DSCH) and associated control channel(DPCCH). Releasing the traffic channel and associated control channel require a long time to reconnect the channels, and maintaining the traffic channel and associated control channel waste the channel resources.

A downlink (or forward link) for transmitting signals from the base station to the mobile station or an uplink (or reverse link) for transmitting signals from the mobile station to the base station includes the following physical channels. The physical channels include a dedicated physical control channel (hereinafter, referred to as DPCCH) in which pilot symbols are included for sync acquisition and channel estimation, and a dedicated physical data channel (hereinafter, referred to as

DPDCH) for exchanging traffic data with a specific mobile station. The downlink DPDCH includes the traffic data, and the downlink DPCCH includes, at each slot (or power control group), transport format combination indicator (hereinafter, referred to as TFCI) which is information about the format of transmission data, transmit power control (hereinafter, referred to as TPC) information which is a power control command, and control information such as the pilot symbols for providing a reference phase so that a receiver (the base station or the mobile station) can compensate the phase. The DPDCH and the DPCCH are time multiplexed within one power control group and the DPDCH and DPCCH signals are spread with one orthogonal code in downlink, and DPDCH and DPCCH signals are separated by using different orthogonal codes in the uplink.

For reference, the invention will be described with reference to a case where a frame length is 10msec and each frame includes 16 or 15 power control groups (PCGs), i.e., each power control group has a length of 0.625msec or 0.667msec. It will be assumed herein that the power control group (0.625msec or 0.667 ms) has the same time period as the slot (0.625msec or 0.667 ms). The power control group (or slot) is comprised of pilot symbol, traffic data, transmission data format concerning information TFCI, and power control information TPC. The values stated above are given by way of example only.

FIG. 2A shows a slot structure including the downlink DPDCH and DPCCH. In FIG 2A, although the DPDCH is divided into traffic data 1 and traffic data 2, there is a case where the traffic data 1 does not exist and only the traffic data 2 exists according to the types of the traffic data. Table 1 below shows the symbols constituting the downlink DPDCH/DPCCH fields, wherein the number of TFCI, TPC and pilot bits in each slot can vary according to a data rate and a spreading

factor.

Unlike the downlink DPDCH and DPCCH, uplink DPDCH and DPCCH for transmitting signals from the mobile station to the base station are separated by 5 channel separation codes.

FIG. 2B shows a slot structure including the uplink DPDCH and DPCCH. In FIG. 2B, the number of TFCI, FBI (FeedBack Information), TPC and pilot bits can vary according to the circumstances influencing the type of the traffic data, such as a provided service, transmit antenna diversity, or a handover (or handoff). The FBI is information about two antennas that the mobile station requests, when the base station uses transmit diversity antennas. Tables 2 and 3 below show the symbols constituting the uplink DPDCH and DPCCH fields, respectively.

15 [Table 1] Downlink DPDCH/DPCCH Fields

Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	SF	Bits/Frame			Bits/Slot	DPDCH Bits/Slot		DPCCH Bits/Slot		
			DPDCH	DPCCH	TOT		N _{data1}	N _{data2}	N _{TFCI}	N _{TPC}	N _{pilot}
16	8	512	64	96	160	10	2	2	0	2	4
16	8	512	32	128	160	10	0	2	2	2	4
32	16	256	160	160	320	20	2	8	0	2	8
32	16	256	128	192	320	20	0	8	2	2	8
64	32	128	480	160	640	40	6	24	0	2	8
64	32	128	448	192	640	40	4	24	2	2	8
128	64	64	1120	160	1280	80	14	56	0	2	8
128	64	64	992	288	1280	80	6	56	8	2	8
256	128	32	2400	160	2560	160	30	120	0	2	8
256	128	32	2272	288	2560	160	22	120	8	2	8
512	256	16	4832	288	5120	320	62	240	0	2	16
512	256	16	4704	416	5120	320	54	240	8	2	16
1024	512	8	9952	288	10240	640	126	496	0	2	16
1024	512	8	9824	416	10240	640	118	496	8	2	16

2048	1024	4	20192	288	20480	1280	254	1008	0	2	16
2048	1024	4	20064	416	20480	1280	246	1008	8	2	16

[Table 2] Uplink DPDCH Fields

Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	SF	Bits/Frame	Bits/Slot	N _{data}
16	16	256	160	10	10
32	32	128	320	20	20
64	64	64	640	40	40
128	128	32	1280	80	80
256	256	16	2560	160	160
512	512	8	5120	320	320
1024	1024	4	10240	640	640

5 [Table 3] Uplink DPCCH Fields

Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	SF	Bits/Frame	Bits/Slot	N _{pilot}	N _{TPC}	N _{TFCI}	N _{FBI}
16	16	256	160	10	6	2	2	0
16	16	256	160	10	8	2	0	0
16	16	256	160	10	5	2	2	1
16	16	256	160	10	7	2	0	1
16	16	256	160	10	6	2	0	2
16	16	256	160	10	5	1	2	2

Tables 1 to 3 show an example where one DPDCH is a traffic channel. However, there may exist second, third and fourth DPDCHs according to the service types. Further, the downlink and uplink both may include several DPDCHs. Here, 10 SF indicates a Spreading Factor.

A hardware structure of the conventional mobile communication system (base station transmitter and mobile station transmitter) will be described below with reference to FIGS. 3A and 3B. Although the base station transmitter and mobile station transmitter will be described with reference to three DPDCHs, the number of

DPDCHs is not limited.

FIG. 3A shows a structure of the conventional base station transmitter. Referring to FIG. 3A, multiplier 111 multiply a DPCCH signal by gain coefficient G_1 , multipliers 121, 131 and 132 multiply DPDCH₁, DPDCH₂ and DPDCH₃ signals, which have undergone channel encoding and interleaving, by gain coefficients G_2 , G_3 and G_4 , respectively. The gain coefficients G_1 , G_2 , G_3 and G_4 may have different values according to circumstances such as the service option and the handover. A multiplexer (MUX) 112 time-multiplexes the DPCCH signal and the DPDCH₁ signal into the slot structure of FIG. 2A. A first serial-to-parallel (S/P) converter 113 distributes the output of the multiplexer 112 to an I channel and a Q channel. Second and third S/P converters 133 and 134 S/P-convert the DPDCH₂ and DPDCH₃ signals and distribute them to the I channel and the Q channel, respectively. The S/P converted I and Q channel signals are multiplied by channelization codes C_{ch1} , C_{ch2} and C_{ch3} in multipliers 114, 122, 135, 136, 137 and 138, for spreading and channel separation. Orthogonal codes are used for the channelization codes. The I and Q channel signals multiplied by the channelization codes in the multipliers 114, 122, 135, 136, 137 and 138 are summed by first and second summers 115 and 123, respectively. That is, the I channel signals are summed by the first summer 115, and the Q channel signals are summed by the second summer 123. The output of the second summer 123 is phase shifted by 90° by a phase shifter 124. A summer 116 sums an output of the first summer 115 and an output of the phase shifter 124 to generate a complex signal $I+jQ$. A multiplier 117 scrambles the complex signal with a PN sequence C_{scramb} which is uniquely assigned to each base station, and a signal separator 118 separates the scrambled signal into a real part and an imaginary part and distributes them to the I channel and the Q channel. The I and Q channel outputs of the signal separator 118 are filtered by

lowpass filters 119 and 125, respectively, to generate bandwidth-limited signals. The output signals of the filters 119 and 125 are multiplied by carriers $\cos\{2\pi f_c t\}$ and $\sin\{2\pi f_c t\}$ in multipliers 120 and 126, respectively, to frequency shift the signals to a radio frequency (RF) band. A summer 127 sums the frequency-shifted I and Q channel signals.

FIG. 3B shows a structure of the conventional mobile station transmitter. Referring to FIG. 3B, multipliers 211, 221, 223 and 225 multiply a DPCCH signal and DPDCH₁, DPDCH₂ and DPDCH₃ signals, which have undergone channel encoding and interleaving, by channelization codes C_{ch1} , C_{ch2} , C_{ch3} and C_{ch4} , respectively, for spreading and channel separation. Orthogonal codes are used for the channelization codes. The output signals of the multipliers 211, 221, 223 and 225 are multiplied by gain coefficients G_1 , G_2 , G_3 and G_4 in multipliers 212, 222, 224 and 226, respectively. The gain coefficients G_1 , G_2 , G_3 and G_4 may have different values. The outputs of the multipliers 212 and 222 are summed by a first summer 213 and output as an I channel signal, and the outputs of the multipliers 224 and 226 are summed by a second summer 227 and output as a Q channel signal. The Q channel signal output from the second summer 227 is phase shifted by 90° in a phase shifter 228. A summer 214 sums the output of the first summer 213 and the output of the phase shifter 228 to generate a complex signal $I+jQ$. A multiplier 215 scrambles the complex signal with a PN sequence C_{scramb} which is uniquely assigned to each base station, and a signal separator 229 separates the scrambled signal into a real part and an imaginary part and distributes them to the I channel and the Q channel. The I and Q channel outputs of the signal separator 229 are filtered by lowpass filters 216 and 230, respectively, to generate bandwidth-limited signals. The output signals of the filters 216 and 230 are multiplied by carriers $\cos\{2\pi f_c t\}$ and $\sin\{2\pi f_c t\}$ in multipliers 217 and 231, respectively, to frequency shift the signals to a

radio frequency (RF) band. A summer 218 sums the frequency-shifted I and Q channel signals.

A conventional transmission signal structure of the base station and the
5 mobile station will be made below. FIG. 5A shows how to transmit the downlink DPCCH and the uplink DPCCH when transmission of the uplink DPDCH is discontinued in a state where there is no data to transmit for a predetermined time.

FIG. 5B shows how to transmit the downlink DPCCH and the uplink
10 DPCCH when transmission of the downlink DPDCH is discontinued in a state where there is no data to transmit for a predetermined time. As illustrated in FIGS. 5A and 5B, the mobile station constantly transmits the uplink DPCCH signal even when the DPDCH data is not existing in order to avoid a resync acquisition process in the base station. When there is no traffic data to transmit for a long time in the
15 control-only substate, the base station and the mobile station make a transition to an RRC (Radio Resource Control) connection release state (not shown). In this state, transmission of the uplink DPDCH is discontinued, but the mobile station transmits pilot symbols and power control bits over the DPCCH until the transition is recovered, thereby increasing an interference of the uplink. The increase in interference of the
20 uplink causes a decrease in the capacity of the uplink.

In the conventional method, although continuous transmission of the uplink DPCCH in the control-only substate is advantageous in that it is possible to avoid the sync reacquisition process in the base station, it creates an interference to the
25 uplink, and decreases the capacity of the uplink. Further, in the downlink, continuous transmission of the uplink power control bits increases interference in the downlink and decreases the capacity of the downlink. Therefore, it is necessary

to minimize a time required for the sync reacquisition process in the base station, decrease the interference due to transmission of the uplink DPCCH and decrease the interference due to transmission of the uplink power control bits over the downlink.

5

SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a communication device and method for minimizing a time required for a sync reacquisition process in the base station when a traffic data does not exist for a predetermined time, control-only substate, for decreasing interference due to continuous transmission of an uplink DPCCH and for decreasing interference due to the transmission of uplink power control bits over a downlink.

15 It is another object of the present invention to provide a device and method for gated transmission of uplink DPCCH signal in a partial period of a power control group in a mobile communication system.

It is further another object of the present invention to provide a device and method for improving a downlink cell capacity and receiving performance by gating an uplink DPCCH signal in a partial period of the power control group in a mobile communication system.

To achieve the above and other objects, there is provided a method for transmitting a frame comprised of a plurality of slots over a dedicated control channel in a duration where there is no transmission message from a mobile station to a base station. Each slot in the frame is comprised of a first slot duration and a

second slot duration. The first slot duration is provided with a power control signal and the second slot duration is provided with no signal at a partial duration thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

5

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1A is a state transition diagram for a packet data service;

10 FIG. 1B is a state transition diagram between a user data active substate and a control-only substate of the DCH/DCH state;

FIG. 2A is a diagram illustrating a slot structure of downlink DPDCH and DPCCH;

15 FIG. 2B is a diagram illustrating a slot structure of uplink DPDCH and DPCCH;

FIG. 3A is a diagram illustrating a structure of a conventional base station transmitter;

FIG. 3B is a diagram illustrating a structure of a conventional mobile station transmitter;

20 FIG. 4A is a diagram illustrating a structure of a base station transmitter according to an embodiment of the present invention;

FIG. 4B is a diagram illustrating a structure of a mobile station transmitter according to an embodiment of the present invention;

25 FIG. 5A is a diagram for explaining how to transmit a downlink DPCCH and an uplink DPCCH when transmission of an uplink DPDCH is discontinued in a conventional control-only substate;

FIG. 5B is a diagram for explaining how to transmit a downlink DPCCH

and an uplink DPCCH when transmission of a downlink DPDCH is discontinued in the conventional control-only substate;

FIG. 6A is a diagram illustrating a method for transmitting a signal according to a regular or gated transmission pattern for an uplink DPCCH in a control-only substate of the invention;

FIG. 6B is a diagram illustrating another method for transmitting a signal according to a regular or gated transmission pattern for an uplink DPCCH in a control-only substate of the invention;

FIG. 7A is a diagram illustrating a method for transmitting a signal when an uplink DPDCH message is generated while an uplink DPCCH is intermittently transmitted in a control-only substate of the invention;

FIG. 7B is a diagram illustrating another method for transmitting a signal when an uplink DPDCH message is generated while an uplink DPCCH is intermittently transmitted in a control-only substate of the invention;

FIG. 8A is a diagram illustrating a method for transmitting downlink and uplink signals when transmission of a downlink DPDCH is discontinued;

FIG. 8B is a diagram illustrating a method for transmitting downlink and uplink signals when transmission of an uplink DPDCH is discontinued;

FIG. 8C is a diagram illustrating another method for transmitting downlink and uplink signals when transmission of the downlink DPDCH is discontinued;

FIG. 8D is a diagram illustrating another method for transmitting downlink and uplink signals when transmission of the uplink DPDCH is discontinued;

FIG. 9A is a diagram illustrating a method for transmitting downlink and uplink signals when transmission of a downlink DPDCH is discontinued (gated transmission for the downlink DPCCH);

FIG. 9B is a diagram illustrating a method for transmitting downlink and uplink signals when transmission of an uplink DPDCH is discontinued (gated

transmission for downlink DPCCH);

FIG. 10A is a diagram illustrating gated transmission for downlink and uplink DPCCHs according to a first embodiment of the present invention;

FIG. 10B is a diagram illustrating gated transmission for downlink and
5 uplink DPCCHs according to a second embodiment of the present invention;

FIG. 10C is a diagram illustrating gated transmission for downlink and uplink DPCCHs according to a third embodiment of the present invention;

FIG. 10D is a diagram illustrating gated transmission for downlink and uplink DPCCHs according to a fourth embodiment of the present invention;

10 FIG. 10E is a diagram illustrating gated transmission for downlink and uplink DPCCHs according to a fifth embodiment of the present invention;

FIG. 11A is a diagram illustrating a method for transmitting a signal when a regular or gated transmission unit of an uplink DPCCH is $1/2$ the power control group in a gating mode according to an embodiment of the present invention;

15 FIG. 11B is a diagram illustrating a structure of a power control group when a gated transmission unit of an uplink DPCCH is $1/2$ the power control group in a gating mode according to an embodiment of the present invention; and

FIG. 11C is a diagram illustrating a method for transmitting a signal when an uplink DPDCH message is generated while transmitting an uplink DPCCH at a
20 gating rate of $1/2$ the power control group in a gating mode according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

25 A preferred embodiment of the present invention will be described herein below with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would

obscure the invention in unnecessary detail.

The term "normal transmission" as used herein refers to continuously transmitting DPCCH signal, control information included in the downlink DPCCH, 5 i.e., TFCI, TPC and pilot symbols or control information included in the uplink DPCCH, ie., TFCI, TPC, FBI and pilot symbols . Further, the term "gate transmission" refers to transmitting the control information included in the downlink DPCCH (i.e., TFCI, TPC and pilot symbols) only at a specific power control group (or slot) according to a predetermined time pattern. In addition, the term "gate 10 transmission" refers to transmitting the control information included in the uplink DPCCH (i.e., TFCI, TPC, FBI and pilot symbols) only at a specific power control group (or slot) according to a predetermined time pattern. The information, transmission of which is discontinued in the downlink DPCCH during gated transmission, may include all of the TFCI, TPC and pilot symbols in an nth power 15 control group (or one slot), or may include the pilot symbols in an nth power control group (or one slot), and TFCI and TPC in an (n+1)th power control group. The information, transmission of which is discontinued in the uplink DPCCH during gated transmission, includes all of TFCI, TPC, FBI and pilot symbols in a specific power control group (or one slot). Herein, "a gated transmission unit is identical to a 20 slot unit" means that TFCI, TPC and pilot symbols within one power control group are set as a gated transmission unit in uplink. Further, "a gated transmission unit is not identical to a slot unit" means that an nth pilot symbol and (n+1)th TFCI and TPC are set as a gated transmission unit in downlink.

25 In addition, since performance of a frame beginning part is very important, the invention locates the TPC for controlling power of the first slot of the next frame at the last slot of one frame. That is, TPC bits for the downlink DPCCH and the

uplink DPCCH are located at the last slot of the n th frame, and power of the first slot of the $(n+1)$ th frame is controlled using the TPC bits existing at the last slot of the n th frame.

- 5 Further, a power control rate can be maintained even when transmission data is generated during gated transmission of the control information according to the present invention. That is, gating of power control information (TPC) is maintained even when transmission data is generated during gated transmission of the control information. In addition, a gating pattern (or gated transmission pattern)
- 10 for the downlink DPCCH and a gating pattern for the uplink DPCCH are determined to have an offset. That is, the control information for the downlink DPCCH and the control information for the uplink DPCCH are transmitted at different time points.

- A hardware structure according to an embodiment of the invention will be
- 15 described below.

- FIG. 4A shows a structure of a base station transmitter according to an embodiment of the present invention. The base station transmitter is different from the conventional one of FIG. 3A in that with regard to the downlink DPCCH, the
- 20 output of the multiplier 111 is gated by a gated transmission controller 141. That is, the gated transmission controller 141 performs gated transmission on the TFCI and TPC bits for the downlink DPCCH at a power control group (or time slot) scheduled with the mobile station in a state where the traffic data is not transmitted over the downlink and uplink DPCCHs for a predetermined period of time. In addition, the
- 25 gated transmission controller 141 performs gated transmission on one power control group (or one entire slot) including the pilot symbols, TFCI and TPC bits for the downlink DPCCH at a power control group (or time slot) scheduled with the mobile

station in a state where the traffic data is not transmitted over the downlink and uplink DPDCHs for a predetermined period of time.

Although the downlink gated transmission pattern is identical to the uplink
 5 gated transmission pattern, an offset may exist between them for efficient power control. The offset is given as a system parameter.

The gated transmission controller 141 can perform gated transmission either when the gated transmission unit is identical to the slot unit or when the gated
 10 transmission unit is not identical to the slot unit. When the gated transmission unit is not identical to the slot unit, the gated transmission controller 141 separately gates the TFCI, TPC and pilot symbols. That is, n th pilot symbol, $(n+1)$ th TFCI and TPC are set as a gated transmission unit.

15 In addition, the gated transmission controller 141 locates the TPC bits for power controlling the first slot of the next frame at the last slot of one frame to secure performance on a beginning part of the next frame. That is, the TPC bits for the downlink DPCCH and the uplink DPCCH are located at the last slot of the n th frame, and power of the first slot of the $(n+1)$ th frame is controlled using the TPC
 20 bits existing at the last slot of the n th frame.

FIG. 4B shows a structure of a mobile station transmitter according to an embodiment of the present invention. The mobile station transmitter is different from the conventional one of FIG. 3B in that a gated transmission controller 241 is
 25 provided to gate transmission of the uplink DPCCH. That is, the gated transmission controller 241 performs gated transmission on one power control group (or one entire slot) or $1/2$ the power control group including the pilot symbols, TFCI, FBI

and TPC bits for the uplink DPCCH at a power control group (or time slot) scheduled with the mobile station in the control-only substate where the traffic data is not transmitted over the downlink and uplink DPDCHs. For sync detection, it is necessary to transmit the pilot symbols and TPC bits over the uplink DPCCH, and
 5 there is no alternative way to transmit the TPC, FBI and pilot symbols over the other uplink channels at the duration where transmission of the above channel is discontinued.

Now, a description will be made of a transmission signal structure of the
 10 base station and the mobile station according to an embodiment of the present invention.

FIG. 6A shows a method for transmitting a signal according to a regular or gated transmission pattern for the uplink DPCCH when there is no DPDCH data to
 15 transmit for a predetermined period of time, according to an embodiment of the present invention. In FIG. 6A, reference numerals 301, 302, 303 and 304 show different gating rates according to a ratio of a duty cycle (hereinafter, referred to as DC). Reference numeral 301 shows a conventional method for transmitting the uplink DPCCH without gating ($DC=1$, i.e., normal transmission), and reference
 20 numeral 302 shows a method for regularly transmitting every other power control group (or time slot), when $DC=1/2$ (only $1/2$ of the whole power control groups in one frame are transmitted). Reference numeral 303 shows a method for regularly transmitting every fourth power control groups (3rd, 7th, 11th and 15th power control groups), when $DC=1/4$ (only $1/4$ of the whole power control groups in one
 25 frame are transmitted). Reference numeral 304 shows a method for regularly transmitting every eighth power control groups (7th and 15th power control groups), when $DC=1/8$ (only $1/8$ of the whole power control groups in one frame are

transmitted). In the embodiment of FIG. 6A, when $DC=1/2$ and $1/4$, although the gated transmission controller 241 of the mobile station regularly gates the power control groups of the uplink DPCCH, it is also possible to gate arbitrary power control groups out of the whole power control groups according to the corresponding DC. That is, when $DC=1/2$, it is also possible to continuously gate arbitrary adjacent power control groups according to an irregular pattern, rather than to regularly transmit every other power control group. Further, when $DC=1/2$, it is also possible to continuously transmit half of the whole power control groups at the second half (8th to 15th power control groups) of the frame. When $DC=1/4$, it is also possible to continuously transmit $1/4$ of the whole power control groups beginning at a $3/4$ point of the frame (i.e., 12th to 15th power control groups). When $DC=1/8$, it is also possible to continuously transmit $1/8$ of the whole power control groups beginning at a $7/8$ point of the frame (i.e., 14th to 15th power control groups).

The gating rate transition method can be divided into several methods as stated below, and is determined according to system setup. In one method, a direct state transition occurs from $DC=1/1$ to $DC=1/2$, from $DC=1/1$ to $DC=1/4$, or from $DC=1/1$ to $DC=1/8$ according to a set timer value or a transition command message from the base station. In another method, a sequential state transition occurs from $DC=1/1$ to $DC=1/2$, from $DC=1/2$ to $DC=1/4$, or from $DC=1/4$ to $1/8$. Selection of the DC value can be determined in consideration of the capacity of the corresponding mobile station or the quality of the channel environment.

FIG. 6B shows a method for transmitting a signal according to a regular or gated transmission pattern for the uplink DPCCH when there is no DPDCH data to transmit for a predetermined time, according to another embodiment of the present invention. In FIG. 6B, reference numerals 305, 306 and 307 show different gating

rates according to a ratio of a duty cycle DC. Reference numeral 305 shows a method for transmitting two consecutive power control groups at regular locations (2nd-3rd, 6th-7th, 10th-11th and 14th-15th power control groups), when DC=1/2 (only 1/2 of the whole power control groups in one frame are transmitted). Reference numeral 5 306 shows a method for transmitting two consecutive power control groups at regular locations (6th-7th and 14th-15th power control groups), when DC=1/4 (only 1/4 of the whole power control groups in one frame are transmitted). Reference numeral 307 shows a method for transmitting two consecutive power control groups at regular locations (14th-15th power control groups), when DC=1/8 (only 1/8 of the 10 whole power control groups in one frame are transmitted). In the embodiment of FIG. 6B, when DC=1/2 and 1/4, although the gated transmission controller 241 of the mobile station regularly gates the power control groups of the uplink DPCCH, it is also possible to gate arbitrary power control groups out of the whole power control groups according to the corresponding DC. That is, when DC=1/2, it is also 15 possible to continuously gate 4 consecutive power control groups (e.g., 2nd-5th power control groups) according to an irregular pattern, rather than to regularly transmit every other 2 consecutive power control groups.

The above gating rate transition method can be divided into several methods 20 as stated below, and is determined according to system setup. In one method, a direct state transition occurs from DC=1/1 (full rate) to DC=1/2, from DC=1/1 to DC=1/4, or from DC=1/1 to DC=1/8 according to a set timer value or a transition command message from the base station. In another method, a sequential state transition occurs from DC=1/1 to DC=1/2, from DC=1/2 to DC=1/4, or from 25 DC=1/4 to 1/8. Selection of the DC value can be determined in consideration of the capacity of the corresponding mobile station or the quality of the channel environment.

FIGS. 7A and 7B show the uplink DPCCH for the case where a transition message is transmitted over the uplink DPDCH when a dedicated MAC (Medium Access Control) logical channel is generated when there is no DPDCH data for a predetermined time as in FIGS. 6A and 6B. Reference numeral 311 of FIG. 7A shows a case where an uplink DPDCH message is generated while the uplink DPCCH does not undergo gated transmission (i.e., while the uplink DPCCH is continuously transmitted ($DC=1/1$)). Reference numeral 312 shows a case where the uplink DPDCH message is generated while the uplink DPCCH undergoes $DC=1/2$ gated transmission. Reference numeral 313 shows a case where the uplink DPDCH message is generated while the uplink DPCCH undergoes $DC=1/4$ gated transmission. Reference numeral 314 shows a case where the uplink DPDCH message is generated while the uplink DPCCH undergoes $DC=1/8$ gated transmission. The power control groups indicated by reference numerals 312, 313 and 314 are transmitted according to the gated transmission pattern for the first frame, and the power control groups in the above period are transmitted at $DC=1$ when the uplink DPDCH is transmitted in the second frame. In the power control groups for normal transmission, the TPC bits for downlink power control can be omitted and the pilot duration (or period) can be extended to a power control group length. Beginning at the power control groups succeeding after transmitting the uplink DPDCH message by normal transmission of the power control groups, it is possible to transmit the uplink DPCCH without gating, or it is possible to gate transmission of the uplink DPCCH according to the original DC value until a state transition message is received from the base station. That is, when the uplink DPDCH message is transmitted for $DC=1/2$ gated transmission, it is possible to perform normal transmission on the power control group of the above duration, thereafter perform $DC=1/2$ gated transmission again, and then perform $DC=1$ gated

transmission, i.e., normal transmission when there exists DPDCH user data.

Like the uplink DPCCH, even in the downlink, when a downlink DPDCH message is generated during gated transmission for the DPCCH, the power control groups, which were transmitted according to the gated transmission pattern, undergo normal transmission to transmit the downlink DPDCH message. In the power control groups for normal transmission, the TPC bits for downlink power control can be omitted and the pilot duration can be extended to a power control group length. Beginning at the power control groups succeeding after transmitting the downlink DPDCH message by normal transmission of the power control groups, it is possible to transmit the downlink DPCCH without gating, or it is possible to gate transmission of the downlink DPCCH according to the original DC value until a state transition request message is received from the mobile station. That is, when the downlink DPDCH message is transmitted for $DC=1/2$ gated transmission, it is possible to perform normal transmission on the power control group of the above duration, thereafter perform $DC=1/2$ gated transmission again, and then perform $DC=1$ gated transmission, i.e., normal transmission when DPDCH user data is transmitted.

Reference numeral 315 of FIG. 7B shows a case where an uplink DPDCH message is generated while the uplink DPCCH undergoes $DC=1/2$ gated transmission. Reference numeral 316 shows a case where the uplink DPDCH message is generated while the uplink DPCCH undergoes $DC=1/4$ gated transmission. Reference numeral 317 shows a case where the uplink DPDCH message is generated while the uplink DPCCH undergoes $DC=1/8$ gated transmission. The power control groups represented by reference numerals 315, 316 and 317 are transmitted according to the gated transmission patterns, and undergo

normal transmission to transmit the uplink DPDCH message. In the power control groups for normal transmission, the TPC bits for downlink power control can be omitted and the pilot duration (or period) can be extended to a power control group length. Beginning at the power control groups succeeding after transmitting the uplink DPDCH message by normal transmission of the power control groups, it is possible to transmit the uplink DPCCH without gating, or it is possible to gate transmission of the uplink DPCCH according to the original DC value until a state transition message is received from the base station. That is, when the uplink DPDCH message is transmitted for DC=1/2 gated transmission, it is possible to perform normal transmission on the power control group of the above duration, thereafter perform DC=1/2 gated transmission again, and then perform DC=1 gated transmission, i.e., normal transmission when DPDCH user data is transmitted.

It is also possible to simultaneously gate transmission of both the uplink DPCCH and the downlink DPCCH according to the same gating pattern. Beginning at the power control groups succeeding after transmitting the downlink DPDCH message by normal transmission of the power control groups, generated while gating transmission of the downlink DPCCH, it is possible to transmit the downlink DPCCH without gating, or it is possible to gate transmission of the downlink DPCCH according to the original DC value until a state transition request message is received from the mobile station. That is, when the downlink DPDCH message is transmitted for DC=1/2 gated transmission, it is possible to perform normal transmission on the power control group of the above duration, perform DC=1/2 gated transmission again, thereafter perform DC=1 gated transmission when transitioning to the user data active substate upon receipt of a state transition request message from the mobile station, and then stop gated transmission when DPDCH user data is transmitted.

FIG. 8A shows a method for transmitting downlink and uplink signals when transmission of a downlink DPDCH is discontinued. When transmission of the downlink DPDCH is discontinued as shown by reference numeral 801 in the user data active substate where there exists no uplink DPDCH, the base station and the mobile station start gated transmission if a set timer value expires or a downlink DPDCH message for state transition is generated. Although FIG. 8A shows an embodiment where a message for starting gated transmission is generated by the base station, it is also possible for the mobile station to send a gating request message to the base station when there is no downlink and uplink DPDCH. While transmitting the downlink DPCCH in FIG. 8A, it is also possible to transmit all the TFCI, TPC and pilot symbols without gating. Since the TPC bits include meaningless TPC values determined by measuring power strength of the pilot symbols of the gated power control groups within the uplink DPCCH, the mobile station ignores the meaningless TPC values transmitted from the base station in order to perform uplink power control in consideration of the gating pattern for the uplink DPCCH, and performs transmission at the same transmission power as the transmission power for the previous power control group. Alternatively, while transmitting the downlink DPCCH in FIG. 8A, it is also possible to gate only the TFCI and TPC bits in the downlink DPCCH without gating the pilot symbols in the downlink DPCCH. At this point, the gating pattern is identical to a gating pattern for the uplink DPCCH of the mobile station. The power control group, in which the TPC bits in the downlink DPCCH are gated, refers to the TPC bits generated by measuring the pilot symbols corresponding to the gated power control group in the DPCCH transmitted from the mobile station.

Reference numeral 802 shows a situation where a message generated for

gated transmission is transmitted to the mobile station over the downlink DPDCH. In this case, the mobile station, which has been gating transmission of the uplink DPCCH, can stop gated transmission upon receipt of a gated transmission stop message when the uplink DPDCH data is transmitted, and continue transmission at DC=1. Alternatively, the mobile station, which has been gating transmission of the uplink DPCCH, can continue gated transmission even after receipt of the gated transmission stop message, stop gated transmission at the time indicated by the gated transmission stop message, and then perform normal transmission (DC=1).

FIG. 8B shows a method for transmitting downlink and uplink signals when transmission of an uplink DPDCH is discontinued. When transmission of the uplink DPDCH is discontinued as shown by reference numeral 803 in the user data active substate where there exists no downlink DPDCH, the base station and the mobile station perform gated transmission at a time point appointed (or scheduled) between them when a set timer value expires or after exchanging a state transition message. Although FIG. 8B shows an embodiment where the message for gated transmission is generated in the downlink DPDCH, the gated transmission message can also be generated in the uplink DPDCH of the mobile station. While transmitting the downlink DPCCH in FIG. 8B, it is also possible to transmit all the TFCI, TPC and pilot symbols without gating. Since the TPC bits include meaningless TPC values determined by measuring power strength of the pilot symbols of the gated power control groups within the uplink DPCCH, the mobile station ignores the meaningless TPC values transmitted from the base station in order to perform uplink power control in consideration of the gating pattern for the uplink DPCCH, and performs transmission at the same transmission power as the transmission power for the previous power control group. Alternatively, while transmitting the downlink DPCCH in FIG. 8B, it is also possible to gate only the TFCI and TPC bits in the

downlink DPCCH without gating the pilot symbols in the downlink DPCCH. At this point, the gating pattern is identical to a gating pattern for the uplink DPCCH of the mobile station. The power control group, in which the TPC bits in the downlink DPCCH are gated, refers to the TPC bits generated by measuring the pilot symbols
 5 corresponding to the gated power control group in the DPCCH transmitted from the mobile station.

Reference numeral 804 shows a situation where a gated transmission message generated by the base station is transmitted to the mobile station over the
 10 downlink DPDCH. In this case, the mobile station, which has been gating transmission of the uplink DPCCH, can stop gated transmission upon receipt of the gated transmission stop message and perform normal transmission (DC=1). Alternatively, the mobile station, which has been gating transmission of the uplink DPCCH, can continue gated transmission even after receipt of the gated
 15 transmission stop message, stop gated transmission at the time point indicated by the gated transmission stop message, and then perform normal transmission (DC=1).

FIG. 8C shows a method for transmitting downlink and uplink signals when transmission of a downlink DPDCH is discontinued. When transmission of the
 20 downlink DPDCH is discontinued as shown by reference numeral 805 in the user data active substate where there exists no uplink DPDCH, the base station and the mobile station start gated transmission if a set timer value expires or a downlink DPDCH message for starting gated transmission is generated. Although FIG. 8C shows an embodiment where the message for gated transmission is generated by the
 25 base station, it is also possible for the mobile station to send a gated transmission request message to the base station when there is no downlink and uplink DPDCH. While transmitting the downlink DPCCH in FIG. 8C, it is also possible to transmit

all the TFCI, TPC and pilot symbols without gating. Since the TPC bits include meaningless TPC values determined by measuring power strength of the pilot symbols of the gated power control groups within the uplink DPCCH, the mobile station ignores the meaningless TPC values transmitted from the base station in order to perform uplink power control in consideration of the gating pattern for the uplink DPCCH, and performs transmission at the same transmission power as the transmission power for the previous power control group. Alternatively, while transmitting the downlink DPCCH in FIG. 8C, it is also possible to gate only the TFCI and TPC bits in the downlink DPCCH without gating the pilot symbols in the downlink DPCCH. At this point, the gating pattern is identical to a gating pattern for the uplink DPCCH of the mobile station. The power control group, in which the TPC bits in the downlink DPCCH are gated, refers to the TPC bits generated by measuring the pilot symbols corresponding to the gated power control group in the DPCCH transmitted from the mobile station.

15

Reference numeral 806 shows a situation where a gated transmission message generated by the mobile station is transmitted to the base station over the uplink DPDCH. In this case, the mobile station, which has been gating transmission of the uplink DPCCH, can stop gated transmission after transmission of the gated transmission message over the uplink DPDCH and then perform normal transmission (DC=1). Alternatively, the mobile station, which has been gating transmission of the uplink DPCCH, can continue gated transmission even after receipt of the gated transmission stop message, stop gated transmission at the time point indicated by the gated transmission stop message, and then perform normal transmission (DC=1).

FIG. 8D shows a method for transmitting downlink and uplink signals when

transmission of an uplink DPDCH is discontinued. When transmission of the uplink DPDCH is discontinued as shown by reference numeral 807 in the user data active substate where there exists no downlink DPDCH for a predetermined period of time, the base station and the mobile station can start gated transmission at a time point

5 appointed (or scheduled) between them when a set timer value expires or after exchanging a gated transmission message. Although FIG. 8D shows an embodiment where the message for gated transmission is generated in the downlink DPDCH, the gated transmission message can also be generated in the uplink DPDCH of the mobile station. While transmitting the downlink DPCCH in FIG. 8D, it is also

10 possible to transmit all the TFCI, TPC and pilot symbols without gating. Since the TPC bits include meaningless TPC values determined by measuring power strength of the pilot symbols of the gated power control groups within the uplink DPCCH, the mobile station ignores the meaningless TPC values transmitted from the base station in order to perform uplink power control in consideration of the gating

15 pattern for the uplink DPCCH, and performs transmission at the same transmission power as the transmission power for the previous power control group. Alternatively, while transmitting the downlink DPCCH in FIG. 8D, it is also possible to gate only the TFCI and TPC bits in the downlink DPCCH without gating the pilot symbols in the downlink DPCCH. At this point, the gating pattern is

20 identical to a gating pattern for the uplink DPCCH of the mobile station. The power control group, in which the TPC bits in the downlink DPCCH are gated, refers to the TPC bits generated by measuring the pilot symbols corresponding to the gated power control group in the DPCCH transmitted from the mobile station.

25 Reference numeral 808 shows a situation where a gated transmission message generated by the mobile station is transmitted to the base station over the uplink DPDCH. In this case, the mobile station, which has been gating transmission

of the uplink DPCCH, can stop gated transmission after transmission of the gated transmission message over the uplink DPDCH and then perform normal transmission (DC=1). Alternatively, the mobile station, which has been gating transmission of the uplink DPCCH, can continue gated transmission even after
 5 transmission of the gated transmission stop message, stop gated transmission at the time point indicated by the gated transmission stop message, and then perform normal transmission (DC=1).

FIG. 9A shows a method for transmitting downlink and uplink signals when
 10 transmission of a downlink DPDCH is discontinued. When transmission of the downlink DPDCH is discontinued, the base station and the mobile station can start gated transmission at a time point appointed between them if a set timer value expires or after exchanging a gated transmission message. FIG. 9A shows a case where a gating pattern for the downlink DPCCH is identical to a gating pattern for
 15 the uplink DPCCH. Although FIG. 9A shows an embodiment where the gated transmission message is generated through the downlink DPDCH, the gated transmission message can also be generated through the uplink DPDCH of the mobile station.

20 FIG. 9B shows a method for transmitting downlink and uplink signals when transmission of an uplink DPDCH is discontinued. When transmission of the uplink DPDCH is discontinued, the base station and the mobile station can start gated transmission at a time point appointed between them if a set timer value expires or after exchanging a gated transmission message. FIG. 9B shows a case where a
 25 gating pattern for the downlink DPCCH is identical to a gating pattern for the uplink DPCCH. Although FIG. 9B shows an embodiment where the gated transmission message is generated through the downlink DPDCH, the gated transmission

message can also be generated through the uplink DPDCH of the mobile station.

In the foregoing drawings and descriptions, the downlink and uplink frames have the same frame start point. However, in the UTRA system, the frame start point of the uplink is artificially delayed by 250μsec as compared with the frame start point of the downlink. This is to make power control time delay become one slot (=0.625ms) in consideration of propagation delay of the transmission signal when a cell radius is smaller than 30Km. Therefore, in consideration of the artificial time delay of the downlink and uplink frame start time, the methods for transmitting the DPCCH signal according to gated transmission can be shown by FIGS. 11A to 11E. FIGS. 10A and 10B show structures of the base station controller and the mobile station controller, which enable such gated transmission, respectively.

FIG. 10A shows gated transmission for the downlink and uplink DPCCHs according to a first embodiment of the present invention. As shown in FIG. 10A, a gated transmission unit for the downlink DPCCH may not be a slot unit. That is, with regard to two adjacent slots, a pilot symbol of an n th slot and TFCI and TPC bits of an $(n+1)$ th slot are set as a gated transmission unit for the downlink DPCCH. This is because the pilot symbol is used to estimate a channel by detecting TFCI and TPC. For example, when a gating rate is 1/2, a pilot symbol of a slot number 0 and TFCI and TPC bits of a slot number 1 are set as a gated transmission unit for the downlink DPCCH. When the gating rate is 1/4, a pilot symbol of a slot number 2 and TFCI and TPC bits of a slot number 3 are set as a gated transmission unit for the downlink DPCCH. When the gating rate is 1/8, a pilot symbol of a slot number 6 and TFCI and TPC bits of a slot number 7 are set as a gated transmission unit for the downlink DPCCH. Here, the gated transmission unit for the downlink DPCCH is set to be different from the actual slot unit, since an n th pilot symbol may be required in

the receiver to demodulate the (n+1)th TPC according to a demodulation method for the TPC signal.

When a signaling message is generated during such gated transmission, the signaling message is transmitted over the downlink or uplink DPDCH. Therefore, performance of the frame start point is very important. In the invention, as shown in FIG. 10A, TPC for the downlink DPCCH and TPC for the uplink DPCCH are located at a slot number 15 (i.e., 16th slot which is the last slot of one frame), so that the first slot of an (n+1)th frame should be power controlled using the TPC bits existing in the last slot of an nth frame. That is, TPC for power controlling the first slot of the next frame is located at the last slot of the present frame.

Meanwhile, in the UTRA system stated above, an offset between the downlink and uplink frame start points is fixed to 250μsec. However, in gated transmission of the downlink and uplink DPCCHs, the offset value can be changed to an arbitrary value while the base station and the mobile station exchange a parameter for DPCCH gated transmission in the call setup process. The offset value is set to a proper value in consideration of a propagation delay of the base station and the mobile station in the call setup process. That is, when the cell radius is over 30Km, the offset value can be set to a value larger than the conventional offset value of 250μsec for DPCCH gated transmission, and the value can be determined through experiments.

FIG. 10B shows gated transmission for the downlink and uplink DPCCHs according to a second embodiment of the present invention. FIG. 10B shows a case where transmission of the downlink DPCCH goes ahead of transmission of the uplink DPCCH during gated transmission, for the gating rates of 1/2, 1/4 and 1/8.

The difference (i.e., offset) is represented by “DL-UD timing” for the gating rates of 1/2, 1/4 and 1/8.

Referring to FIG. 10B, with regard to two adjacent slots, a pilot symbol of the nth slot and TFCI and TPC of the (n+1)th slot are set as a gated transmission unit for the downlink DPCCH. For example, for the gating rate 1/2, a pilot symbol of a slot number 0 and TFCI and TPC of a slot number 1 are set as a gated transmission unit for the downlink DPCCH. For the gating rate 1/4, a pilot symbol of a slot number 2 and TFCI and TPC of a slot number 3 are set as a gated transmission unit for the downlink DPCCH. For the gating rate 1/8, a pilot symbol of a slot number 6 and TFCI and TPC of a slot number 7 are set as a gated transmission unit for the downlink DPCCH.

In addition, it is noted that TPC for power controlling the first slot of the next frame is located at the last slot of the present frame. That is, TPC for the downlink DPCCH and TPC for the uplink DPCCH are both located at a slot number 15 (i.e., 16th slot).

FIG. 10C shows gated transmission for the downlink and uplink DPCCHs according to a third embodiment of the present invention. FIG. 10C shows a case where transmission of the uplink DPCCH goes ahead of transmission of the downlink DPCCH during gated transmission, for the gating rates of 1/2, 1/4 and 1/8.

Referring to FIG. 10C, with regard to two adjacent slots, a pilot symbol of the nth slot and TFCI and TPC of the (n+1)th slot are set as a gated transmission unit for the downlink DPCCH. For example, for the gating rate 1/2, a pilot symbol of a slot number 1 and TFCI and TPC of a slot number 2 are set as a gated transmission

unit for the downlink DPCCH. For the gating rate $1/4$, a pilot symbol of a slot number 2 and TFCI and TPC of a slot number 3 are set as a gated transmission unit for the downlink DPCCH. For the gating rate $1/8$, a pilot symbol of a slot number 6 and TFCI and TPC of a slot number 7 are set as a gated transmission unit for the
 5 downlink DPCCH.

In addition, it is noted that TPC for power controlling the first slot of the next frame is located at the last slot of the present frame. That is, TPC for the downlink DPCCH and TPC for the uplink DPCCH are both located at a slot number
 10 15 (i.e., 16^{th} slot).

FIG. 10D shows gated transmission for the downlink and uplink DPCCHs according to a fourth embodiment of the present invention. FIG. 10D shows a case where for the gating rates of $1/2$, $1/4$ and $1/8$, transmission of the downlink DPCCH
 15 goes ahead of transmission of the uplink DPCCH during gated transmission, and the downlink and uplink gating patterns are set to the same period.

Referring to FIG. 10D, with regard to two adjacent slots, a pilot symbol of the n th slot and TFCI and TPC of the $(n+1)$ th slot are set as a gated transmission unit
 20 for the downlink DPCCH. For example, for the gating rate $1/2$, a pilot symbol of a slot number 0 and TFCI and TPC of a slot number 1 are set as a gated transmission unit for the downlink DPCCH. For the gating rate $1/4$, a pilot symbol of a slot number 0 and TFCI and TPC of a slot number 1 are set as a gated transmission unit for the downlink DPCCH. For the gating rate $1/8$, a pilot symbol of a slot number 2
 25 and TFCI and TPC of a slot number 3 are set as a gated transmission unit for the downlink DPCCH.

In addition, it is noted that TPC for power controlling the first slot of the next frame is located at the last slot of the present frame. That is, TPC for the downlink DPCCH and TPC for the uplink DPCCH are both located at a slot number 15 (i.e., 16th slot).

5

FIG. 10E shows gated transmission for the downlink and uplink DPCCHs according to a fifth embodiment of the present invention. FIG. 10E shows a case where for the gating rates of 1/2, 1/4 and 1/8, transmission of the uplink DPCCH goes ahead of transmission of the downlink DPCCH during gated transmission, and
10 the downlink and uplink gating patterns are set to the same period.

Referring to FIG. 10E, with regard to two adjacent slots, a pilot symbol of the n th slot and TFCI and TPC of the $(n+1)$ th slot are set as a gated transmission unit for the downlink DPCCH. For example, for the gating rate 1/2, a pilot symbol of a
15 slot number 1 and TFCI and TPC of a slot number 2 are set as a gated transmission unit for the downlink DPCCH. For the gating rate 1/4, a pilot symbol of a slot number 2 and TFCI and TPC of a slot number 3 are set as a gated transmission unit for the downlink DPCCH. For the gating rate 1/8, a pilot symbol of a slot number 6 and TFCI and TPC of a slot number 7 are set as a gated transmission unit for the
20 downlink DPCCH.

In addition, it is noted that TPC for power controlling the first slot of the next frame is located at the last slot of the present frame. That is, TPC for the downlink DPCCH and TPC for the uplink DPCCH are both located at a slot number
25 15 (i.e., 16th slot). FIG. 10E shows that TPC for the downlink DPCCH is not located at the slot number 15 for a 1/2 gating rate.

FIG. 11A shows a method for transmitting a signal according to regular or gated transmission pattern for an uplink DPCCH in a gating mode according to an embodiment of the present invention. In the embodiment, gated transmission can be performed in a unit of a partial power control group (PCG) duration (e.g., 1/2 PCG) rather than in a unit of one PCG. Thus, the embodiment will have the same operation as described above, except that gated transmission is performed in the unit of 1/2 PCG. Performing gate transmission in the unit of 1/2 PCG is to increase a rate of downlink power control and decrease the influence of delay.

The rate and delay of downlink power control for the duty cycle $DC=1/2$ when performing gated transmission in the unit of 1/2 PCG is equal to the rate and delay of downlink power control for the case where gated transmission is not performed. The rate and delay of the downlink power control for $DC=1/4$ when performing gated transmission in the unit of 1/2 PCG is equal to the rate and delay of the downlink power control for the case where gated transmission is performed in the unit of the PCG at $DC=1/2$. Therefore, compared with the case where gated transmission is performed in the unit of the PCG, it is possible to improve performance of the downlink power control by performing gated transmission in the unit of 1/2 PCG, and also improve downlink cell capacity and receiving performance.

Referring to FIG. 11A, reference numeral 10 shows a method for regularly transmitting every other 1/2 PCG, when an uplink DPCCH undergoes gated transmission in the unit of 1/2 PCG and $DC=1/2$. Specifically, gated transmission is performed in the order of the second half of the 0th slot, the second half of the 1st slot, the second half of the 2nd slot, ..., the second half of 15th slot. Reference numeral 20 shows a method for transmitting only 1/2 PCG of every second PCG,

when the uplink DPCCH undergoes gated transmission in the unit of $1/2$ PCG and $DC=1/4$. Specifically, gated transmission is performed in the order of the second half of the 1st slot, the second half of the 3rd slot, the second half of the 5th slot, ..., the second half of 15th slot. Reference numeral 30 shows a method for transmitting only
 5 $1/2$ PCG of every fourth PCG, when the uplink DPCCH undergoes gated transmission in the unit of $1/2$ PCG and $DC=1/8$. Specifically, gated transmission is performed in the order of the second half of the 3rd slot, the second half of the 7th slot, the second half of the 11th slot, ..., the second half of 15th slot. The slot positions where transmission occurs may be varied. Although the description has been made
 10 with reference to an example where gated transmission is performed at the second half of one slot, it is also possible to perform gated transmission at the first half of one slot.

A mobile station transmitter for gating transmission of the uplink DPCCH in
 15 the unit of $1/2$ PCG as shown in FIG. 11A has the same structure as the mobile station transmitter shown in FIG. 4B. However, the gated transmission controller 241 has different operation. That is, the gated transmission controller 241 which performs gated transmission in the unit of $1/2$ PCG, gates transmission of $1/2$ PCG including the pilot symbol and the TFCI, FBI and TPC bits at a predetermined $1/2$
 20 PCG position.

That is, the mobile station of FIG. 4B transmits a frame comprised of a plurality of slots to the base station over the uplink DPCCH at a duration where there is no transmission message. At this point, each slot in the frame is divided into
 25 a first slot duration and a second slot duration, and the gated transmission controller 241 provides a power control signal to the first slot duration and provides no signal to a part of the second slot duration.

FIG. 11B shows a PCG structure of the DPCCH used when the uplink DPCCH is gated in the unit of 1/2 PCG. Referring to FIG. 11B, when gated transmission is performed in the unit of 1/2 PCG, there is no symbol in the first half of the PCG and the second half of the PCG is comprised of the pilot, TFCI, FBI and TPC symbols. Tables 4A, 4B and 4C below show the symbols constituting an uplink DPCCH field. In Tables 4A, 4B and 4C, N_{pilot} , N_{TPC} , N_{TFCI} and N_{FBI} indicate the number of the pilot, TPC, TPCI and FBI bits included in each slot, respectively.

10 [Table 4A]

	N_{pilot}	N_{TPC}	N_{TFCI}	N_{FBI}
Non Gated TX	8	2	0	0
Gated TX	3	2	0	0
	4	1	0	0

[Table 4B]

	N_{pilot}	N_{TPC}	N_{TFCI}	N_{FBI}
Non Gated TX	7	2	0	1
Gated TX	2	2	0	1

[Table 4C]

	N_{pilot}	N_{TPC}	N_{TFCI}	N_{FBI}
Non Gated TX	6	2	0	2
Gated TX	3	1	0	1

As shown in Tables 4A, 4B and 4C, during gated transmission, the bit number of other fields is maintained and only the pilot symbol may not be transmitted at the

first half of the slot and the number of the pilot symbols may be varied, compared with the case where gated transmission is not performed. During gated transmission, the bit number of each field may be either fixed to a predetermined value, or indicated by a message provided from the base station. It is also possible to
 5 determine the number of fields for gated transmission in a similar manner, even for a case other than those shown in Tables 4A, 4B and 4FIG. 11C shows an uplink DPCCH message transmitted when a message to be transmitted over the uplink DPDCH is generated in a gating mode in the unit of $1/2$ PCG according to an embodiment of the present invention.

10

Referring to FIG. 11C, reference numeral 10 shows an uplink DPDCH message generated while performing $DC=1/2$ gated transmission on the uplink DPCCH. Reference numeral 20 shows an uplink DPDCH message generated while performing $DC=1/4$ gated transmission on the uplink DPCCH. Reference numeral
 15 30 shows an uplink DPDCH message generated while performing $DC=1/8$ gated transmission. When transmitting the uplink DPDCH message, the gated portion of the uplink DPCCH is filled with the pilot symbol before transmission. Transmission of the TFCI, FBI, TPC fields is optional.

20

As described above, the invention minimizes the time required for the sync reacquisition process in the base station, minimizes an increase in interference and a decrease in the mobile station using time due to continuous transmission of the uplink DPCCH, and minimizes an increase in interference due to transmission of the uplink power control bit over the downlink, thereby to increase the capacity. In
 25 addition, it is possible to improve downlink cell capacity and receiving performance by gating transmission of the uplink DPCCH at a partial duration of the power control group.

While the invention has been shown and described with reference to a certain preferred embodiment thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing
5 from the spirit and scope of the invention as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A mobile station transmitter for transmitting a data frame in a mobile communication system during a time duration when there is no transmission message transmitted from a mobile station to a base station, comprising a dedicated control channel (DPCCH) including at least a power control signal, said data frame having a plurality of time slots and being transmitted over said dedicated control channel, wherein each time slot in the data frame further comprises a first slot duration and a second slot duration, wherein the first slot duration contains said power control signal and the second slot duration contains no signal during at least a partial duration thereof.

2. A method for transmitting control information in a mobile station of a mobile communication system which transmits the control information filled in a frame on a dedicated control channel, the frame being divided into a plurality of slots, the method comprising the steps of:

determining whether there is data to transmit to a base station; and gating transmission of the control information in a partial duration of a predetermined one of the slots when there is no data to transmit for a predetermined time.

3. The method as claimed in claim 2, wherein the control information includes a power control signal.

4. The method as claimed in claim 2, wherein the control information includes pilot symbols, TFCI bits, and FBI bits for a phase difference between at least two transmit diversity antennas used by the base station.

5. A mobile station transmitter for a mobile communication system, comprising:

a dedicated control channel (DPCCH) for transmitting control information
5 including a power control signal;

a dedicated data channel (DPDCH) for transmitting user data or signaling data;

a switch for gating a signal on the dedicated control channel; and

a controller for gating the switch such that when there is no dedicated data
10 channel signal to be transmitted to a base station for a predetermined time, the control information is transmitted in a partial duration of a predetermined one of slots constituting a frame.

6. The mobile station transmitter as claimed in claim 5, wherein the
15 control information includes pilot symbols, TFCI bits, and FBI bits for a phase difference between at least two transmit diversity antennas used by the base station.


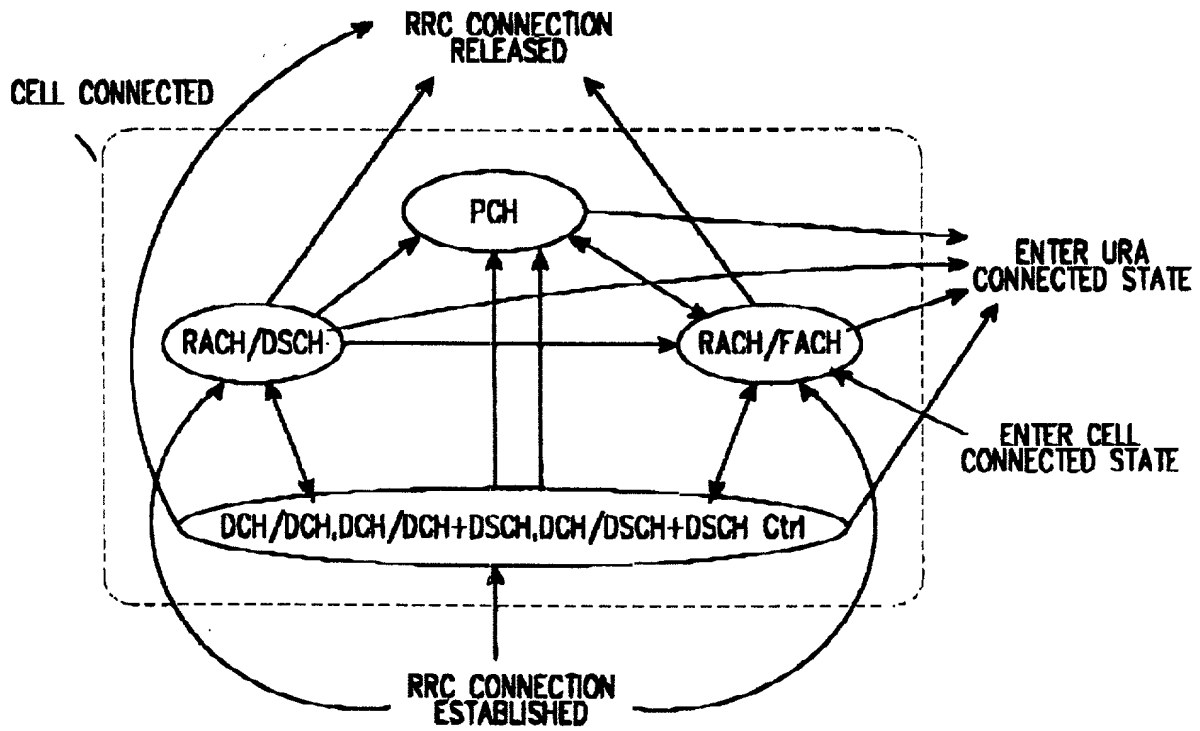


FIG. 1A



Variable	Mean	SD	Min	Max
Age	45.5	10.5	25	65
Gender	Male			
Marital Status	Married			
Education	High School			
Occupation	Manager			
Income	\$50,000			
Health Status	Good			
Exercise Frequency	Weekly			
Stress Level	Low			
Sleep Quality	Good			
Dietary Habits	Healthy			
Alcohol Consumption	Low			
Tobacco Use	None			
Family Size	2			
Work Hours	40			
Commuting Time	30			
Home Ownership	Owned			
Neighborhood Safety	High			
Access to Healthcare	Yes			
Health Insurance	Private			
Medical History	None			
Current Medications	None			
Genetic Predisposition	Low			
Environmental Factors	Low			
Lifestyle Changes	Yes			
Support System	Strong			
Healthcare Access	Good			
Healthcare Quality	High			
Healthcare Cost	Low			
Healthcare Satisfaction	High			
Healthcare Utilization	High			
Healthcare Access Barrier	Low			
Healthcare Quality Barrier	Low			
Healthcare Cost Barrier	Low			
Healthcare Satisfaction Barrier	Low			
Healthcare Utilization Barrier	Low			
Healthcare Access Barrier	Low			
Healthcare Quality Barrier	Low			
Healthcare Cost Barrier	Low			
Healthcare Satisfaction Barrier	Low			
Healthcare Utilization Barrier	Low			

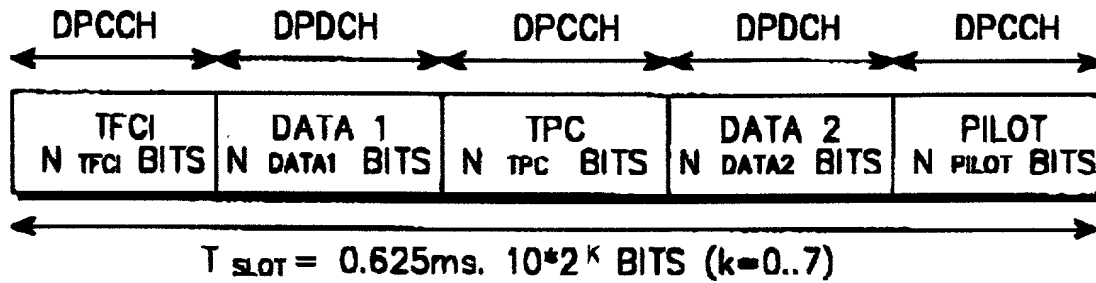


FIG. 2A

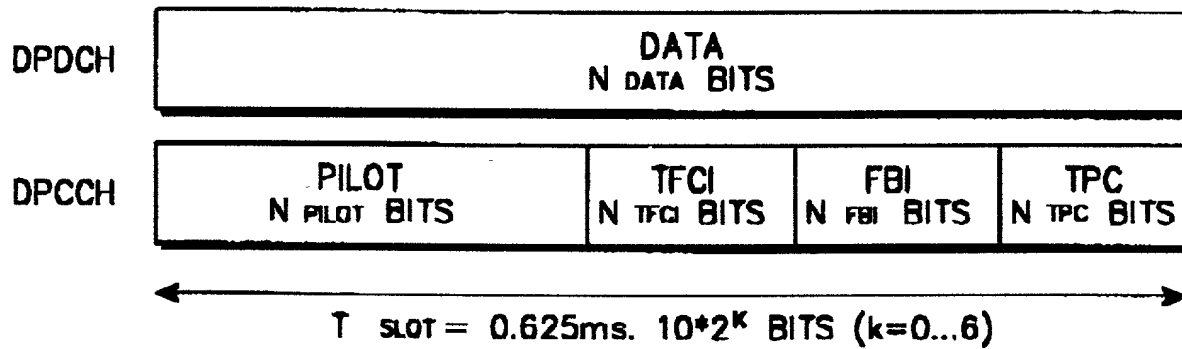


FIG. 2B

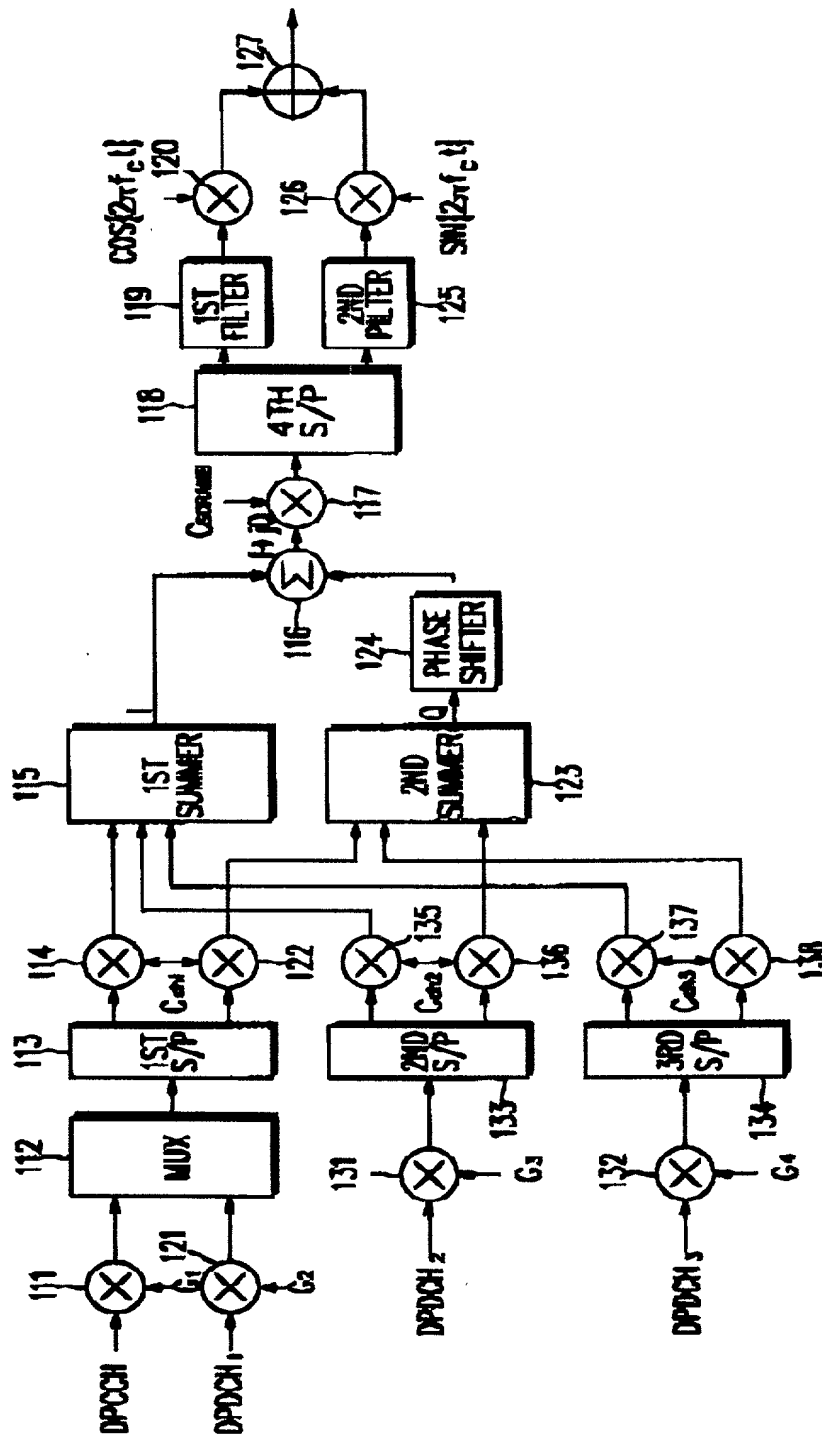


FIG. 3A

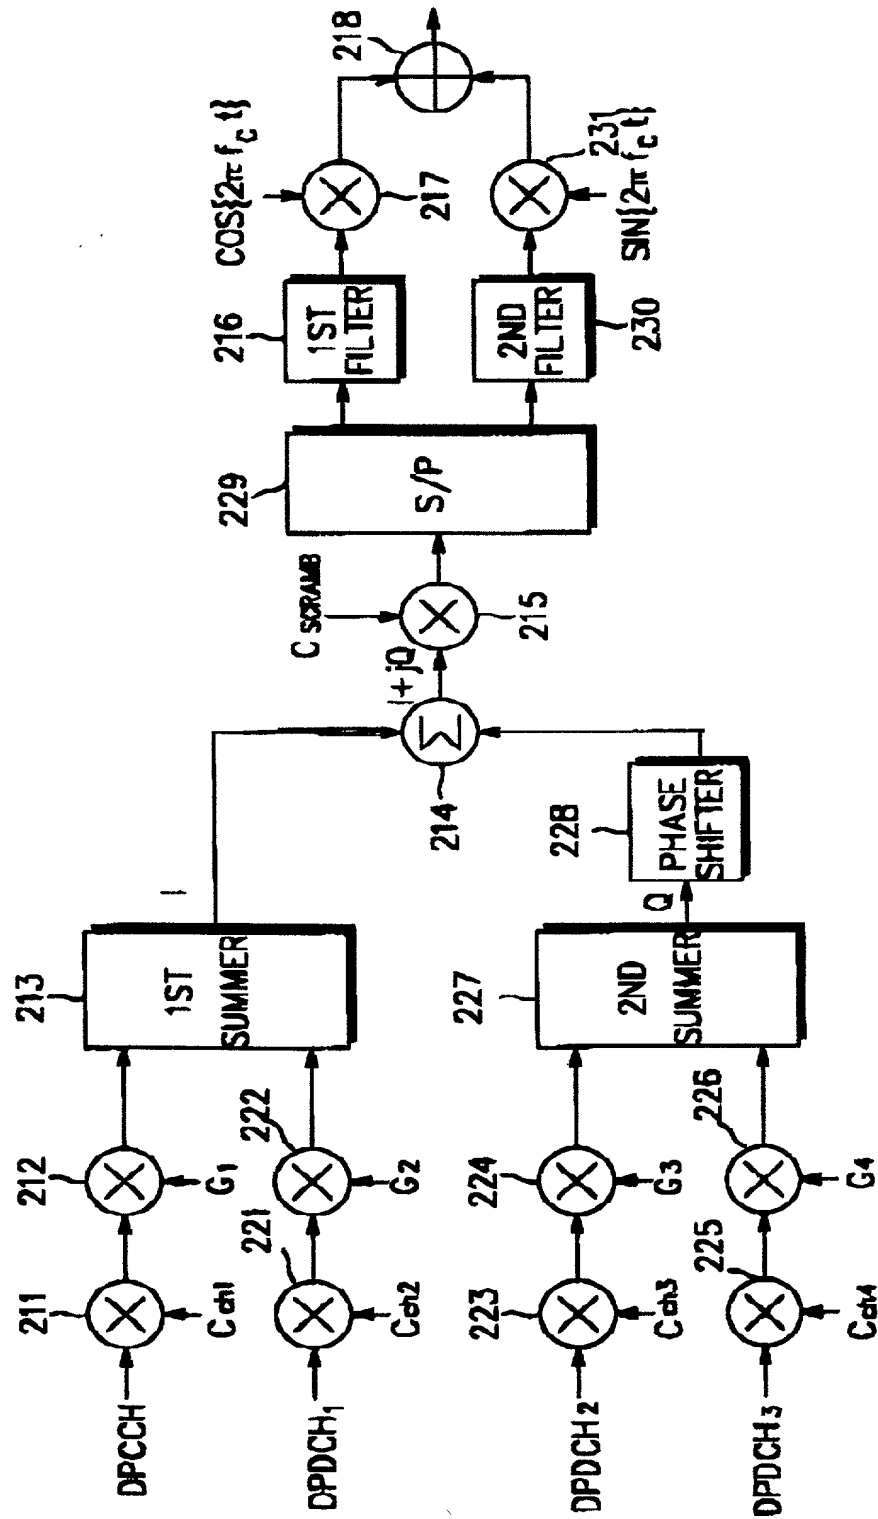


FIG. 3B

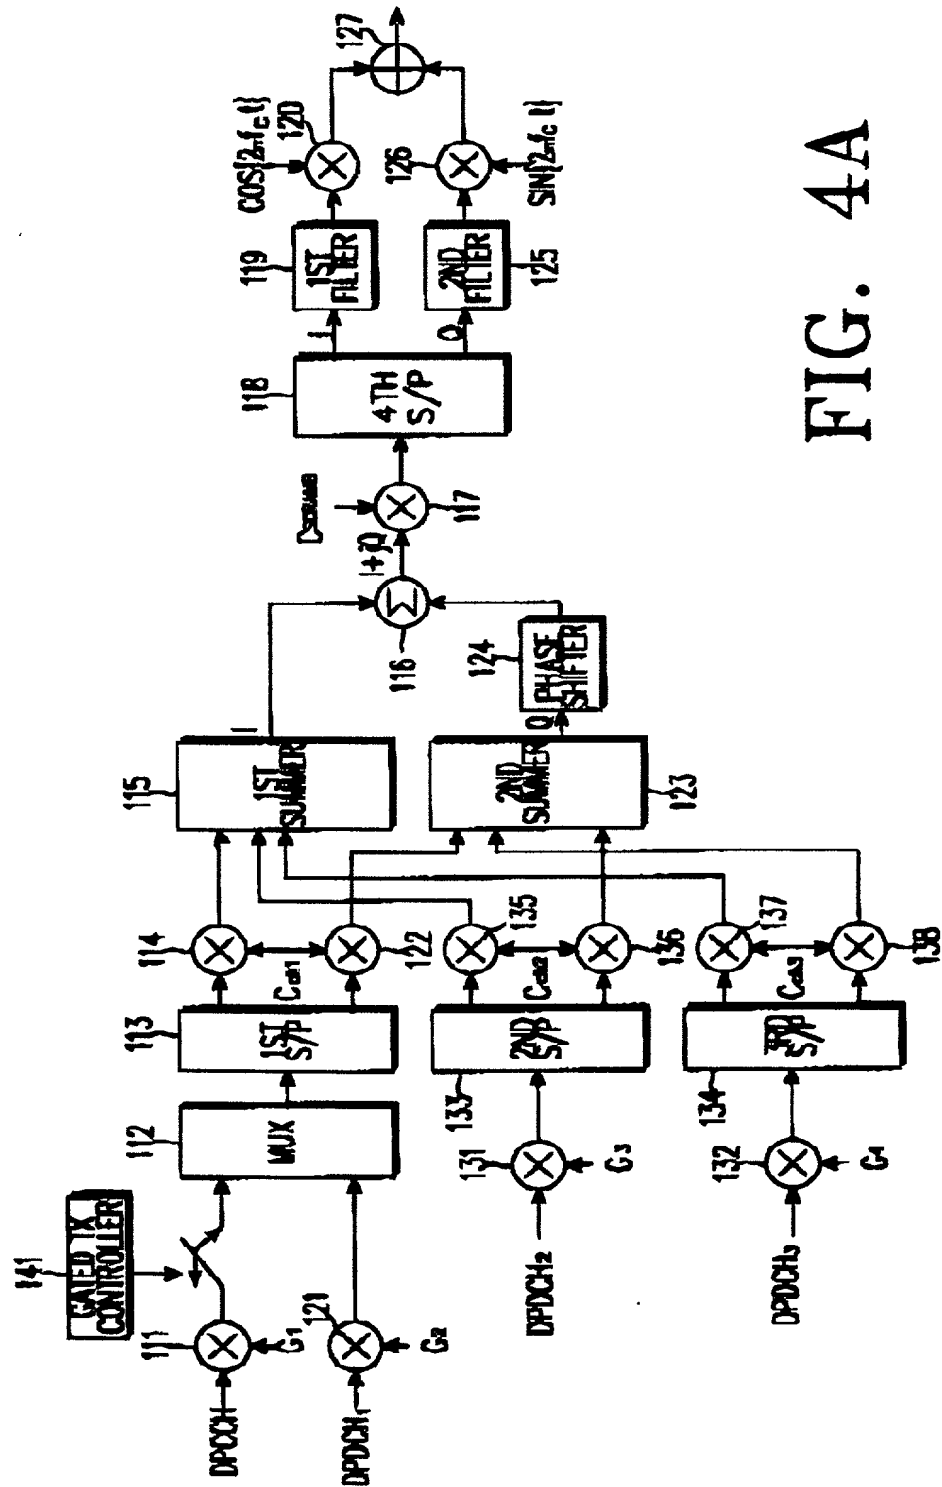


FIG. 4A

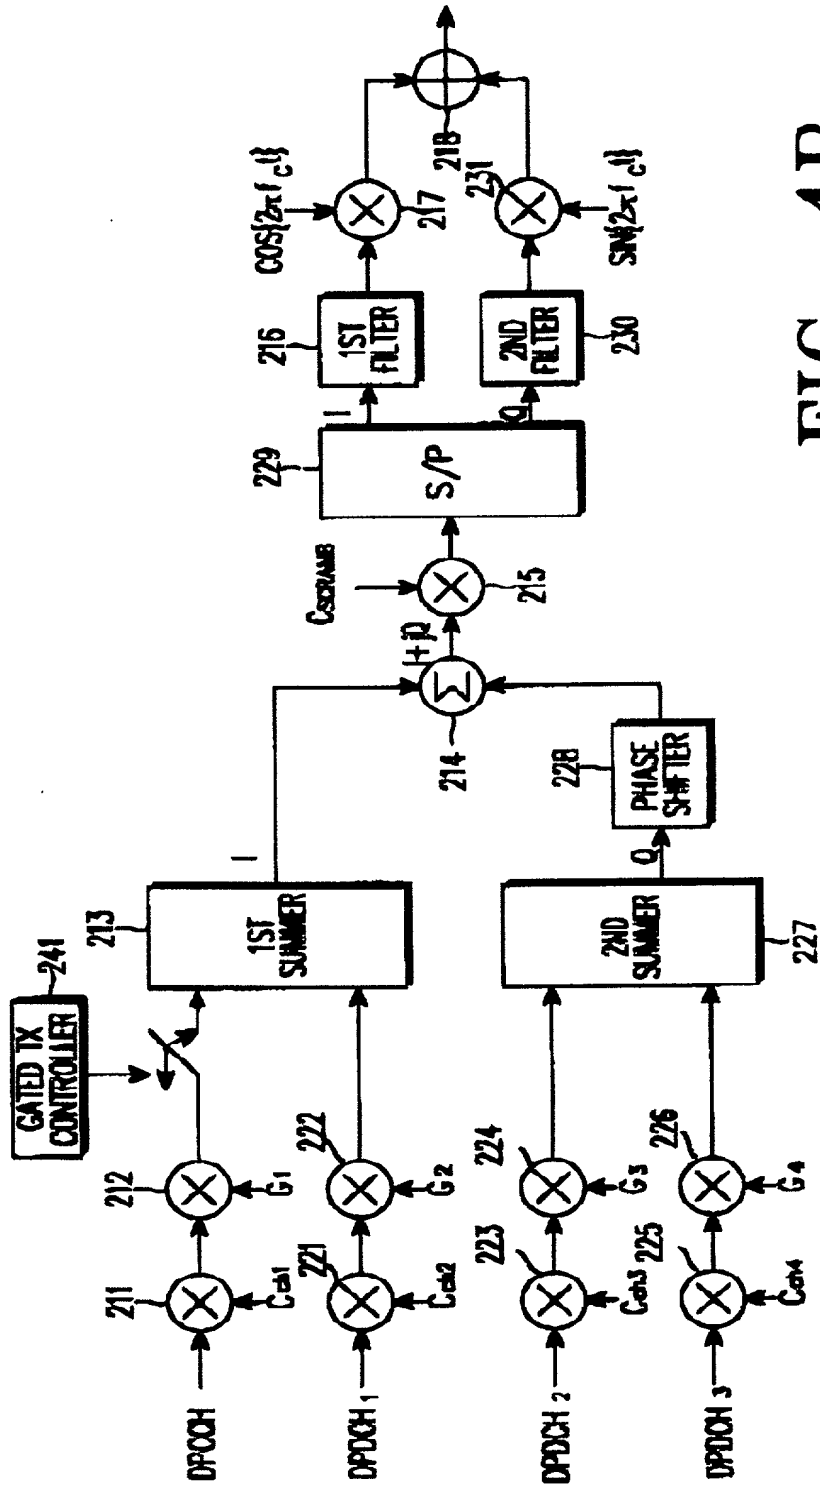


FIG. 4B

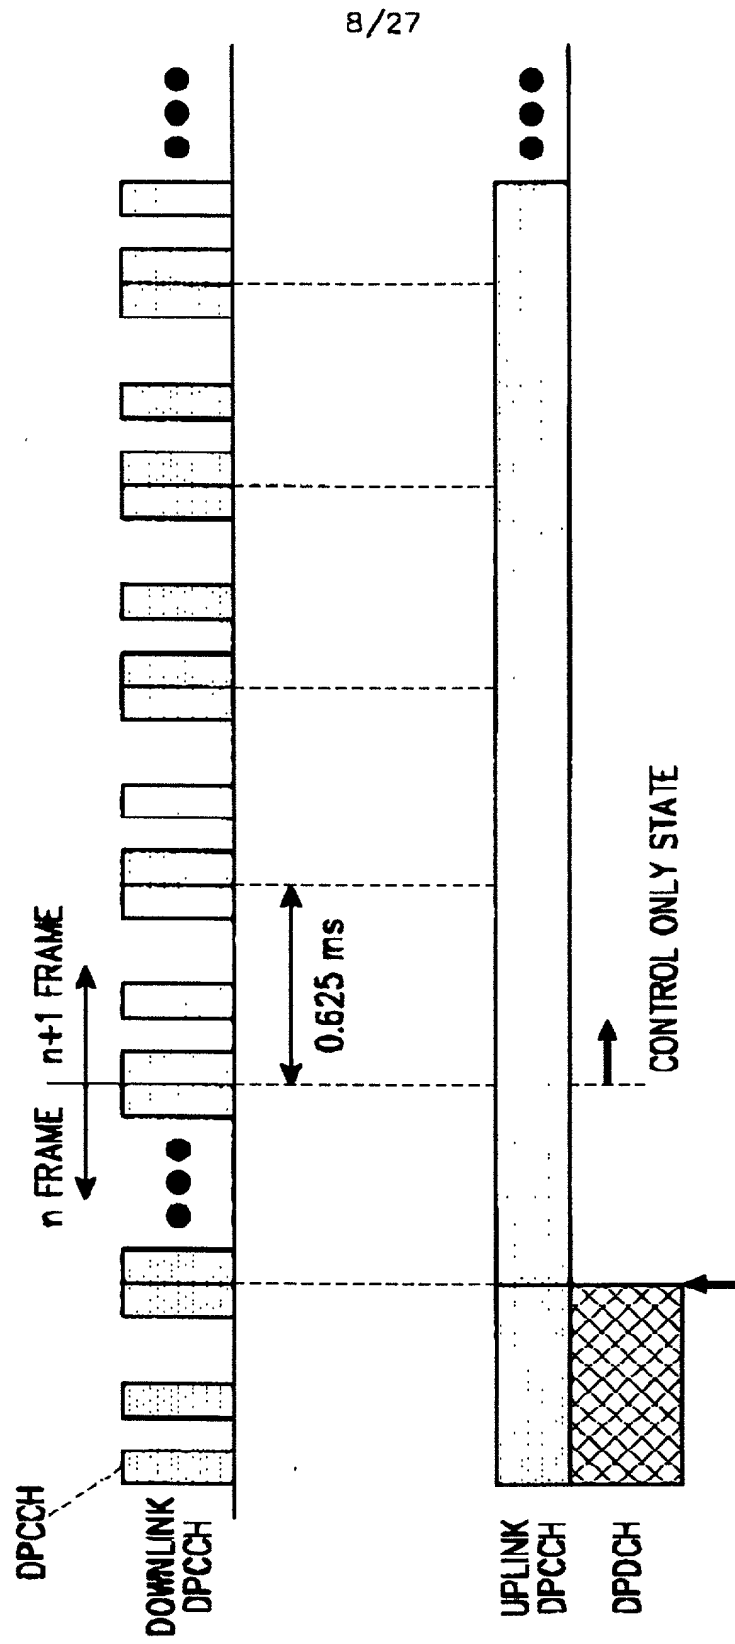


FIG. 5A

FIG. 6A

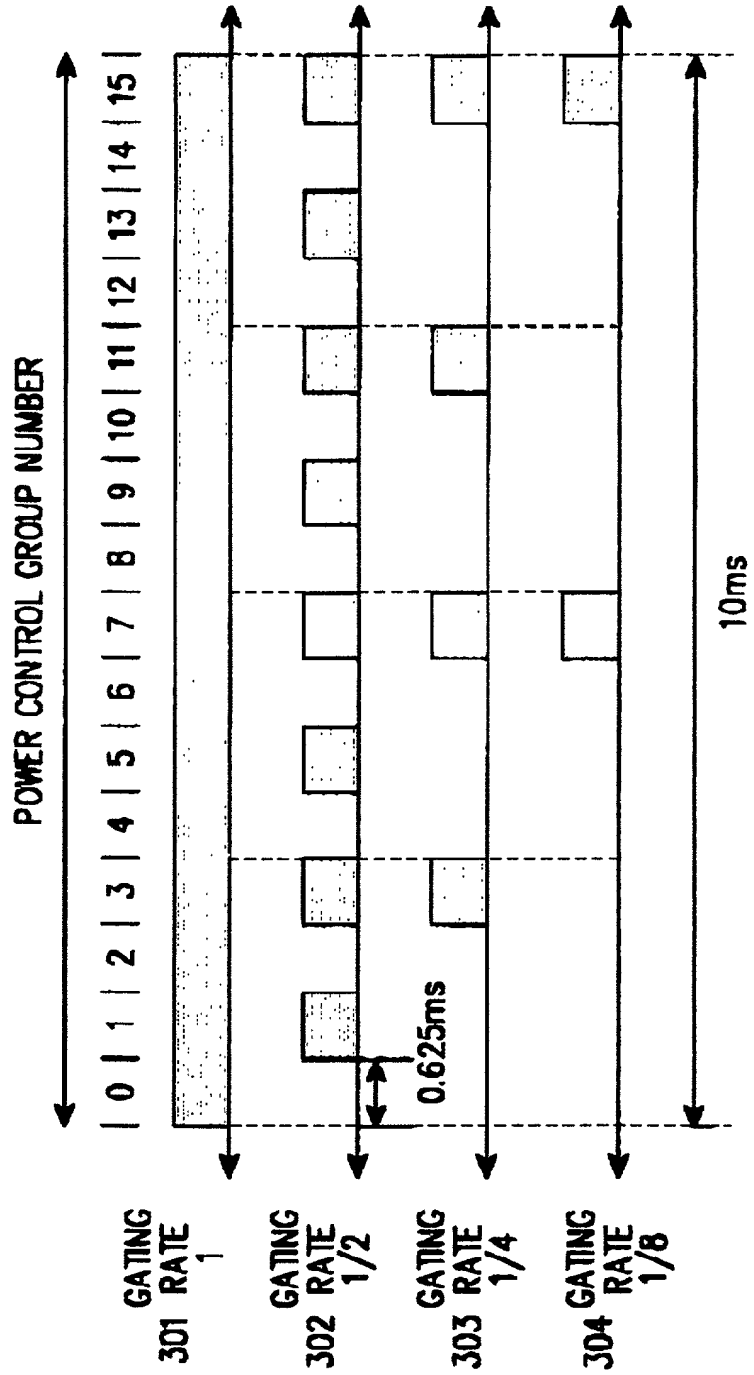


FIG. 7A

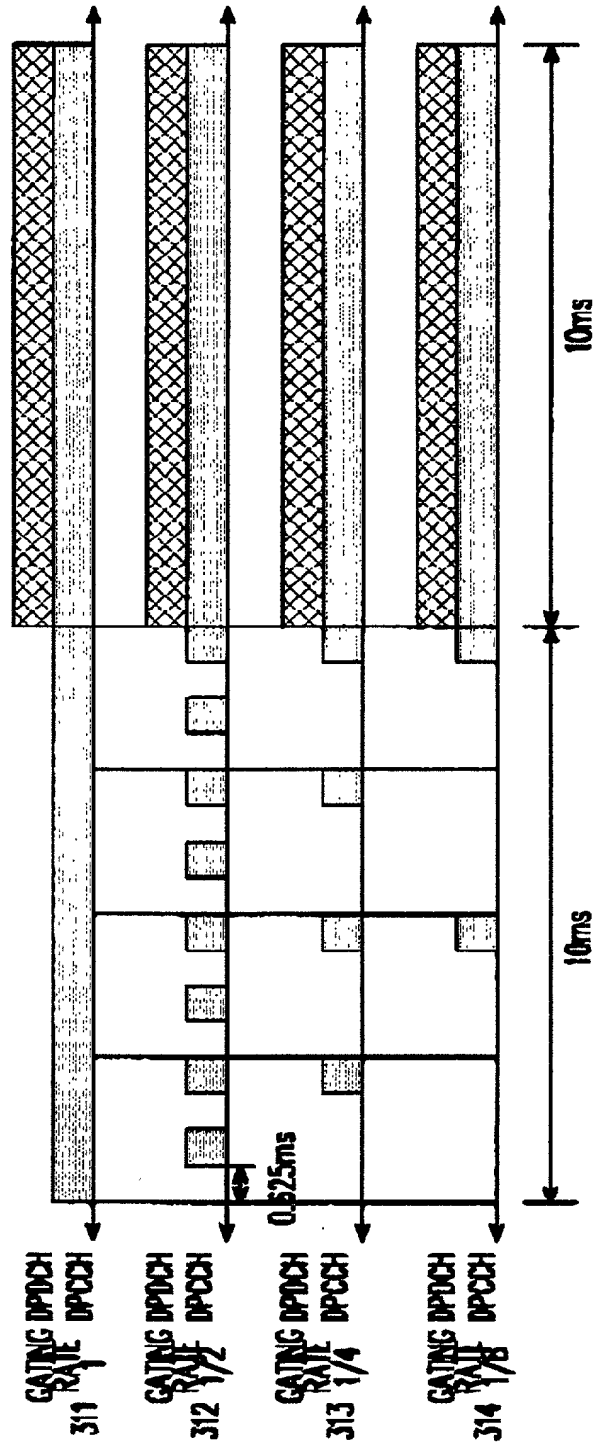


FIG. 7B

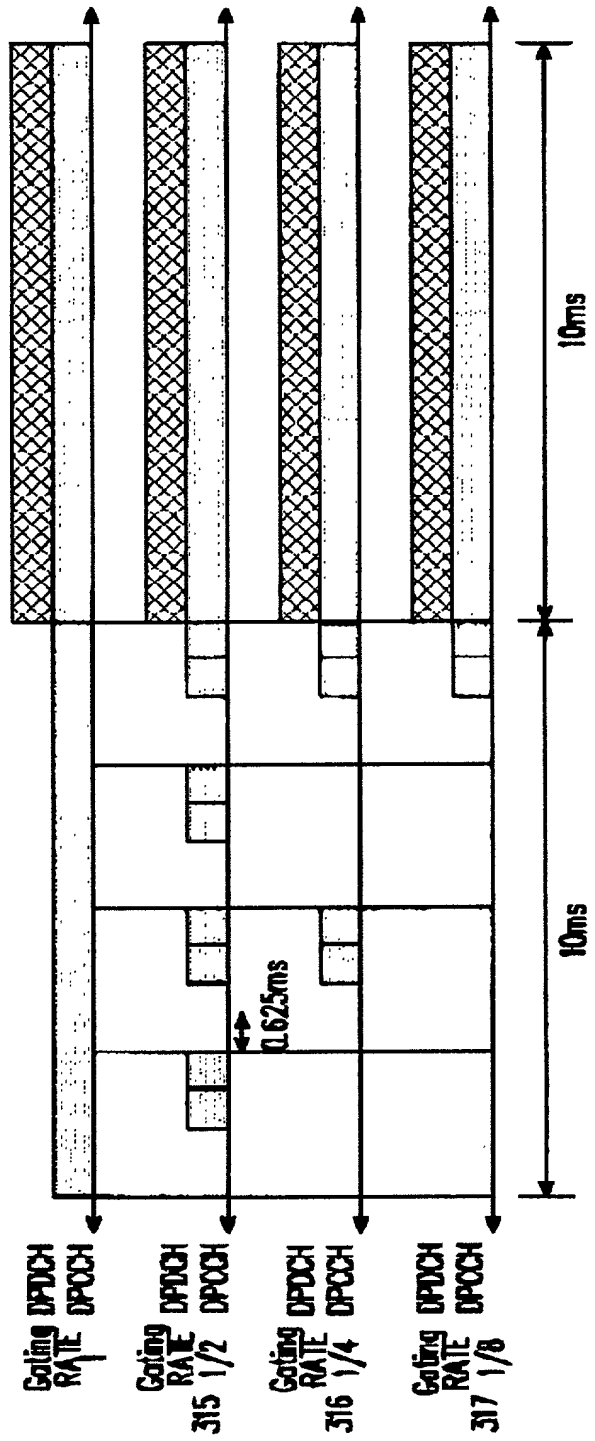
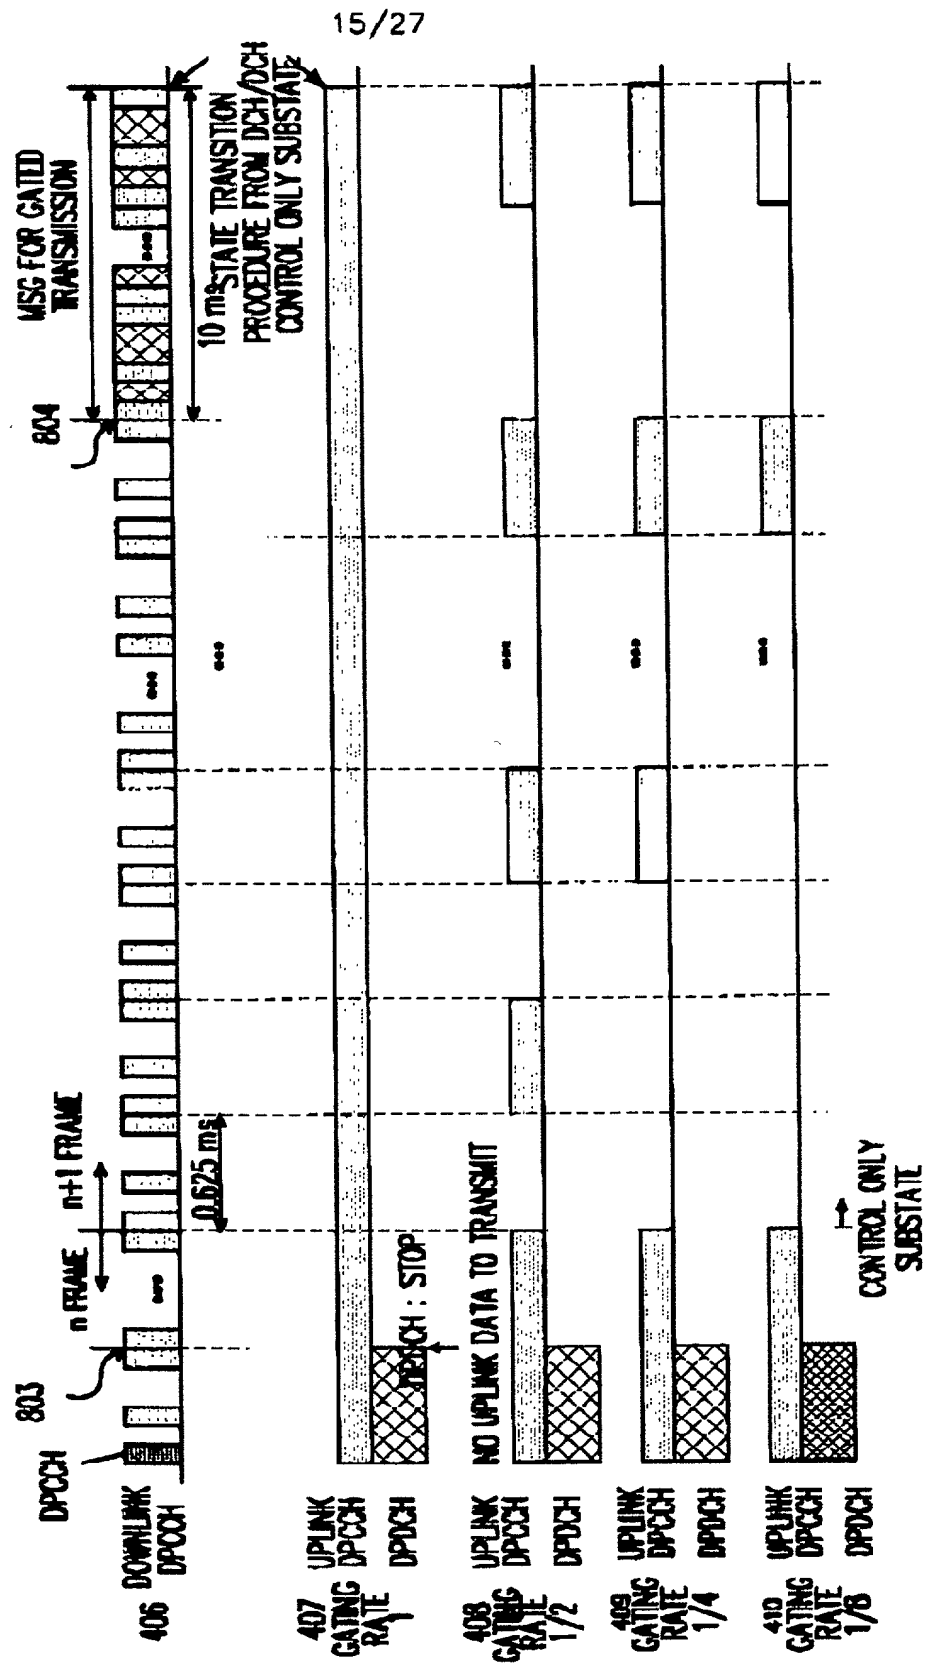


FIG. 8B



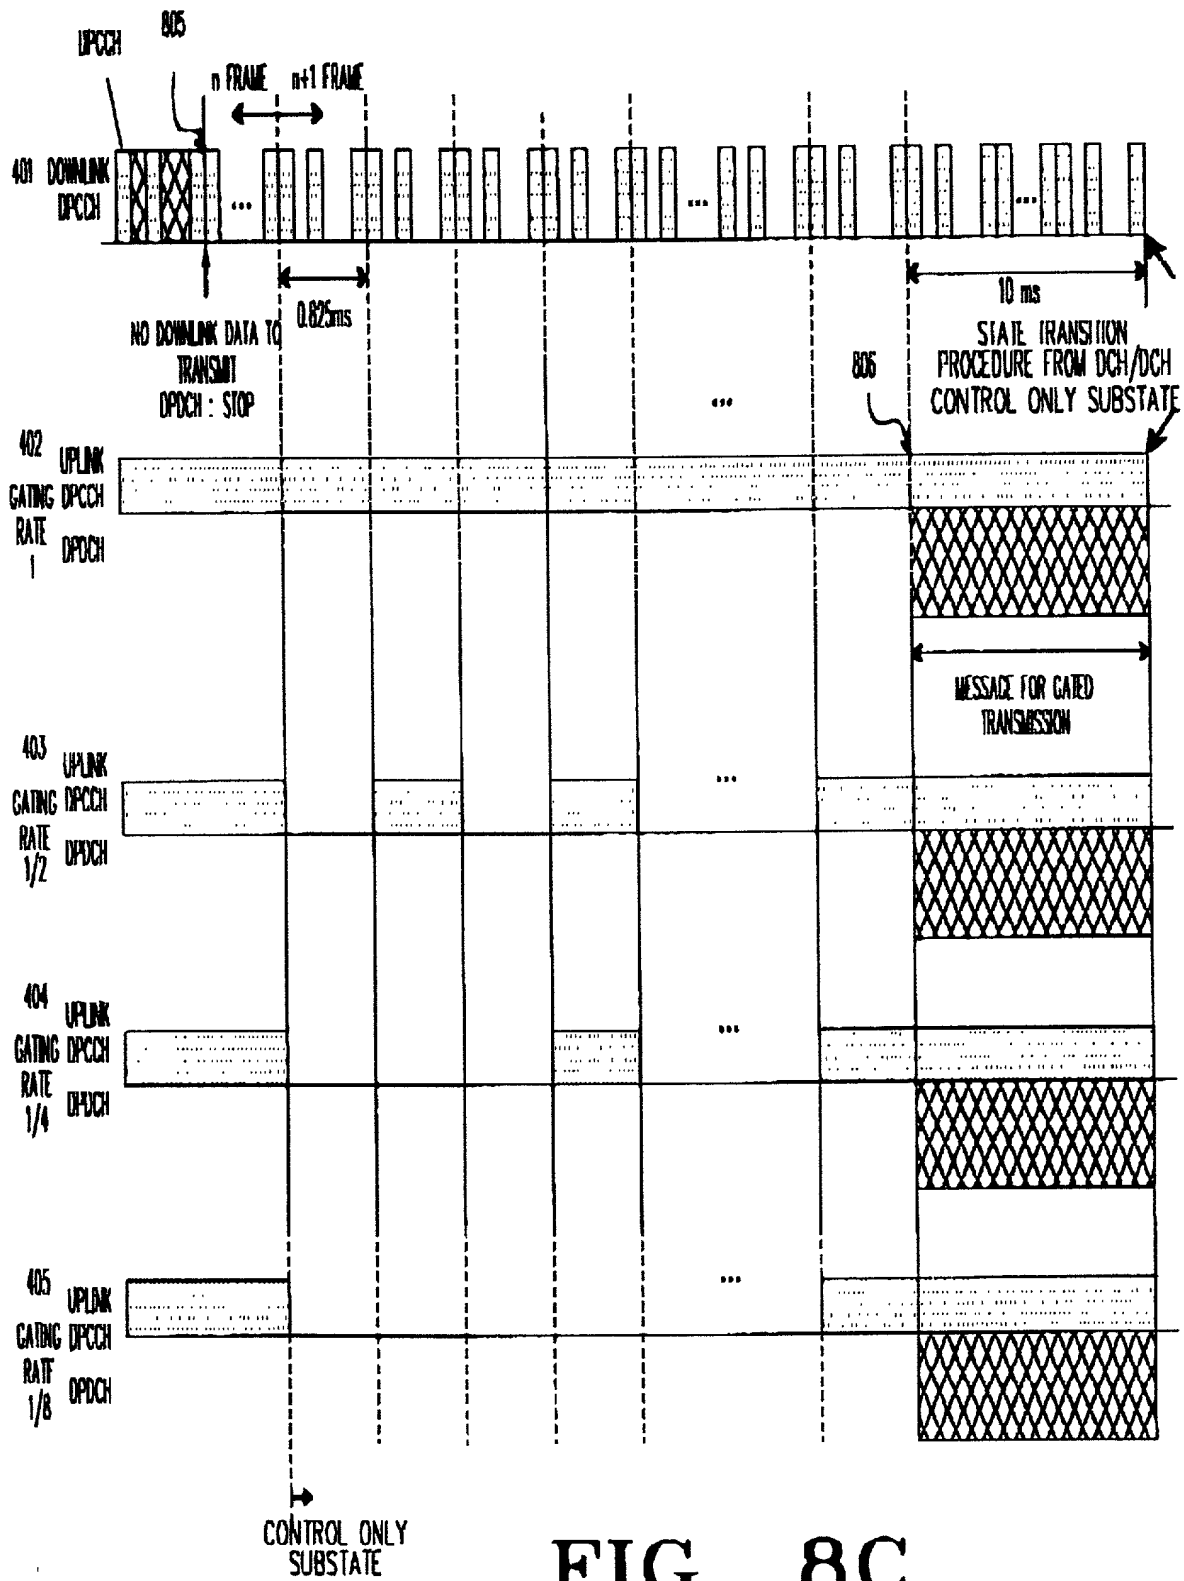


FIG. 8C

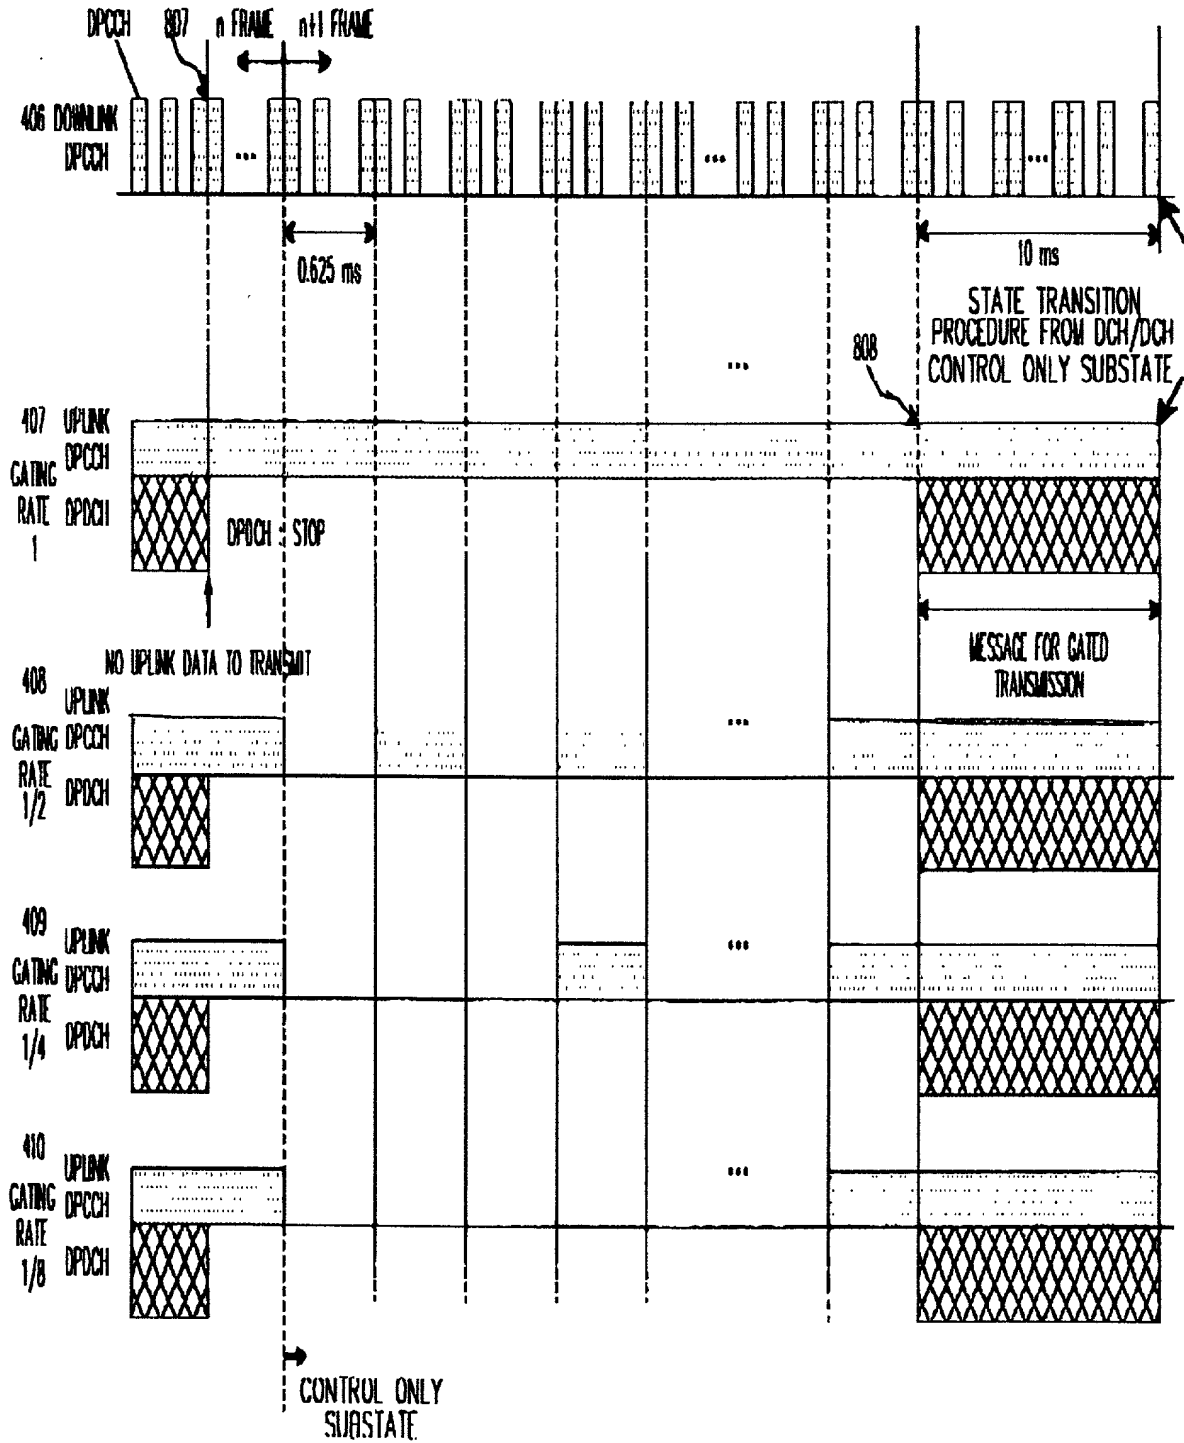


FIG. 8D

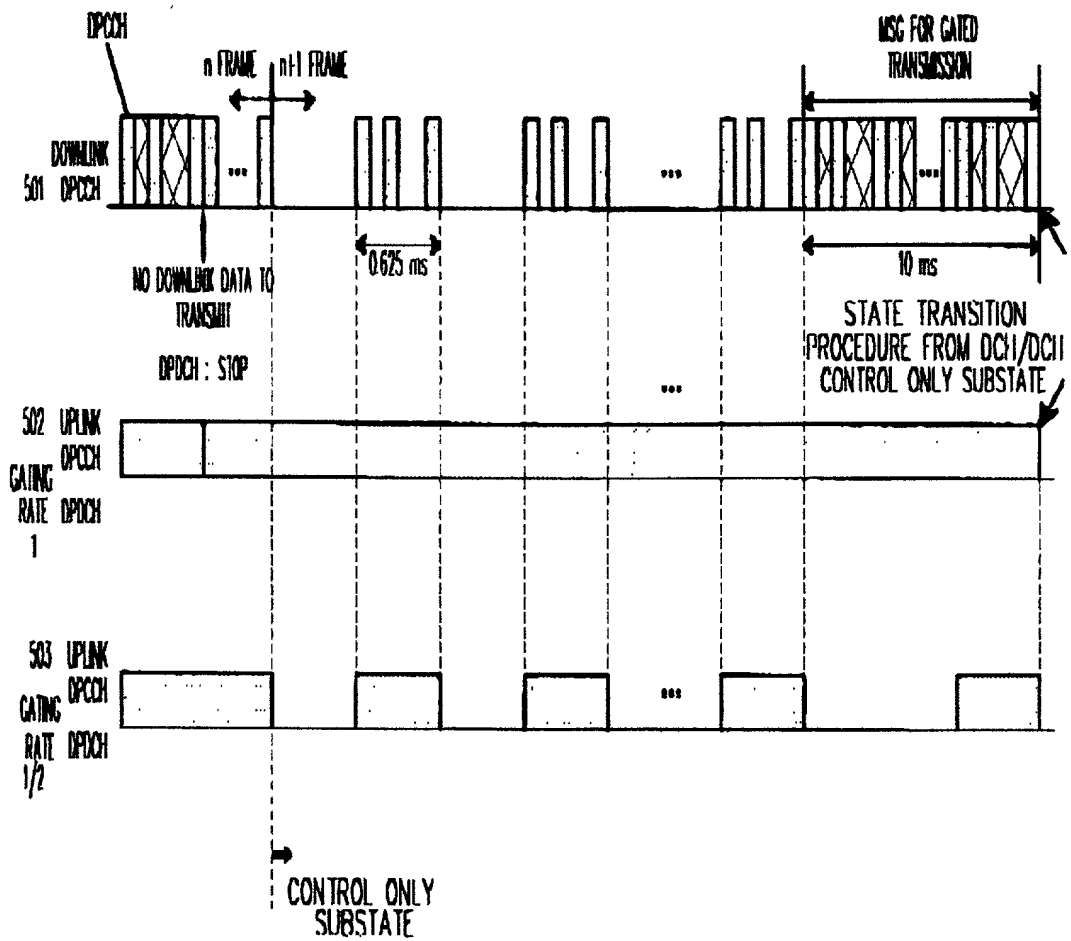


FIG. 9A

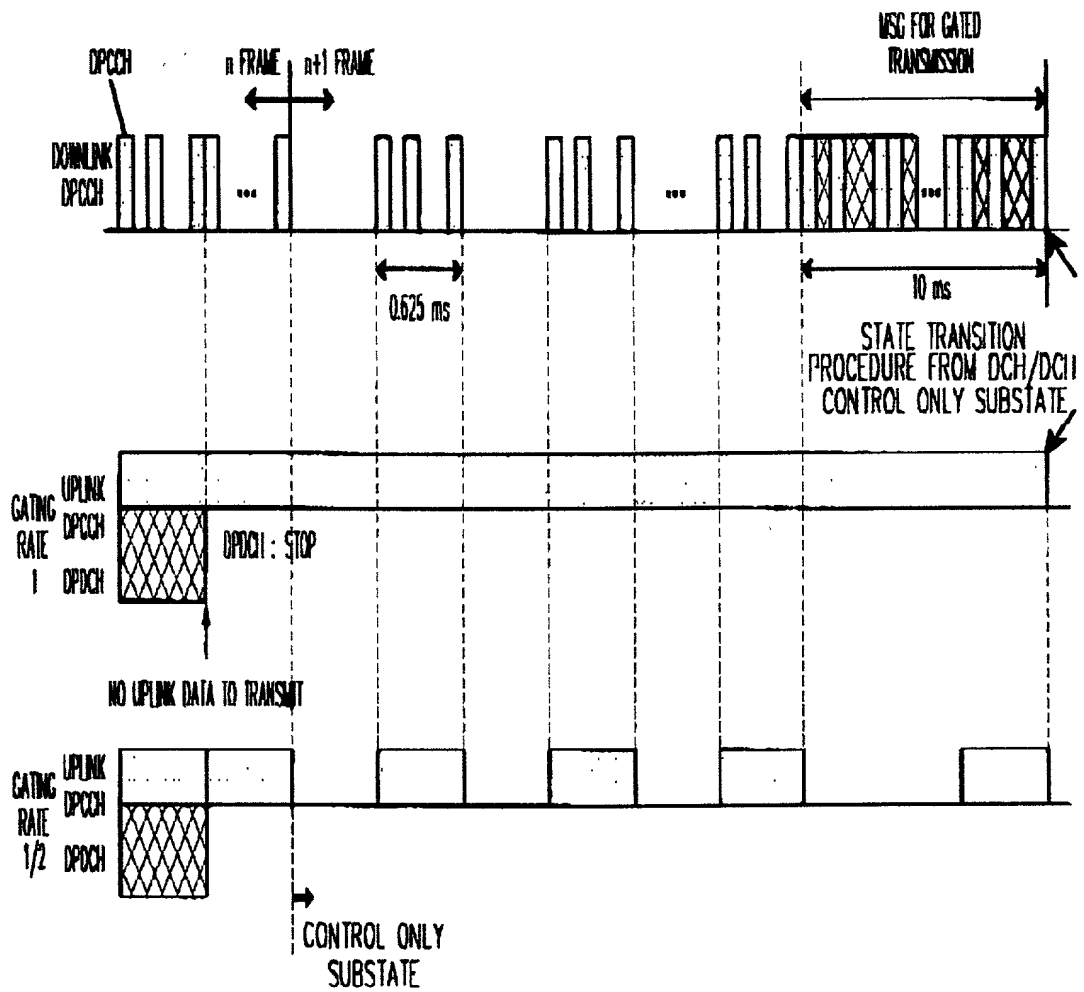


FIG. 9B

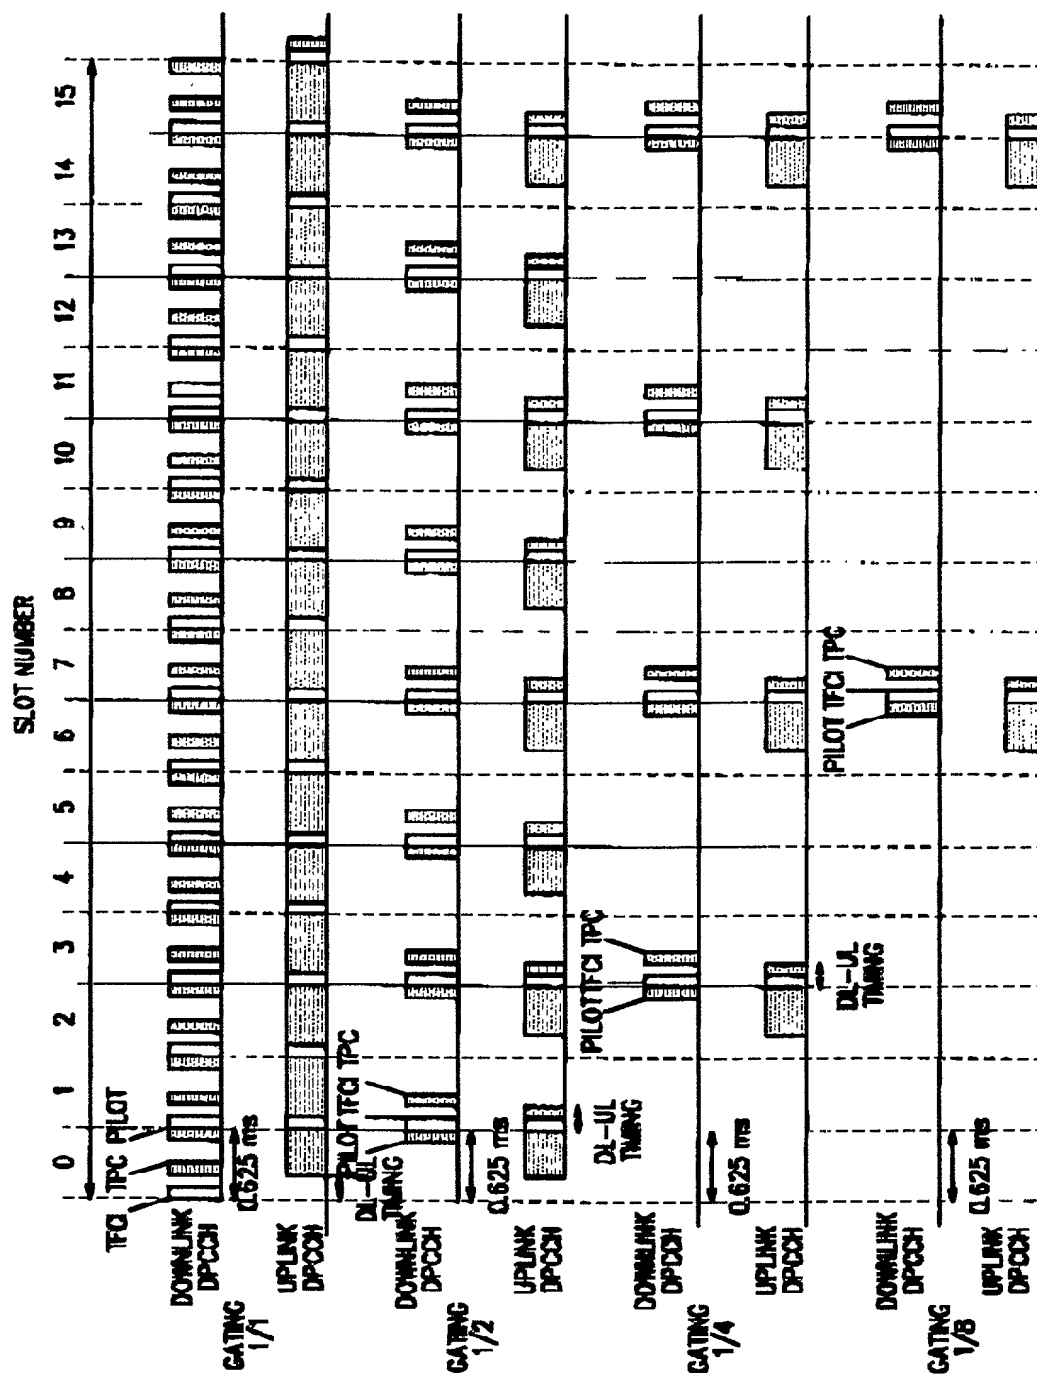


FIG. 10A

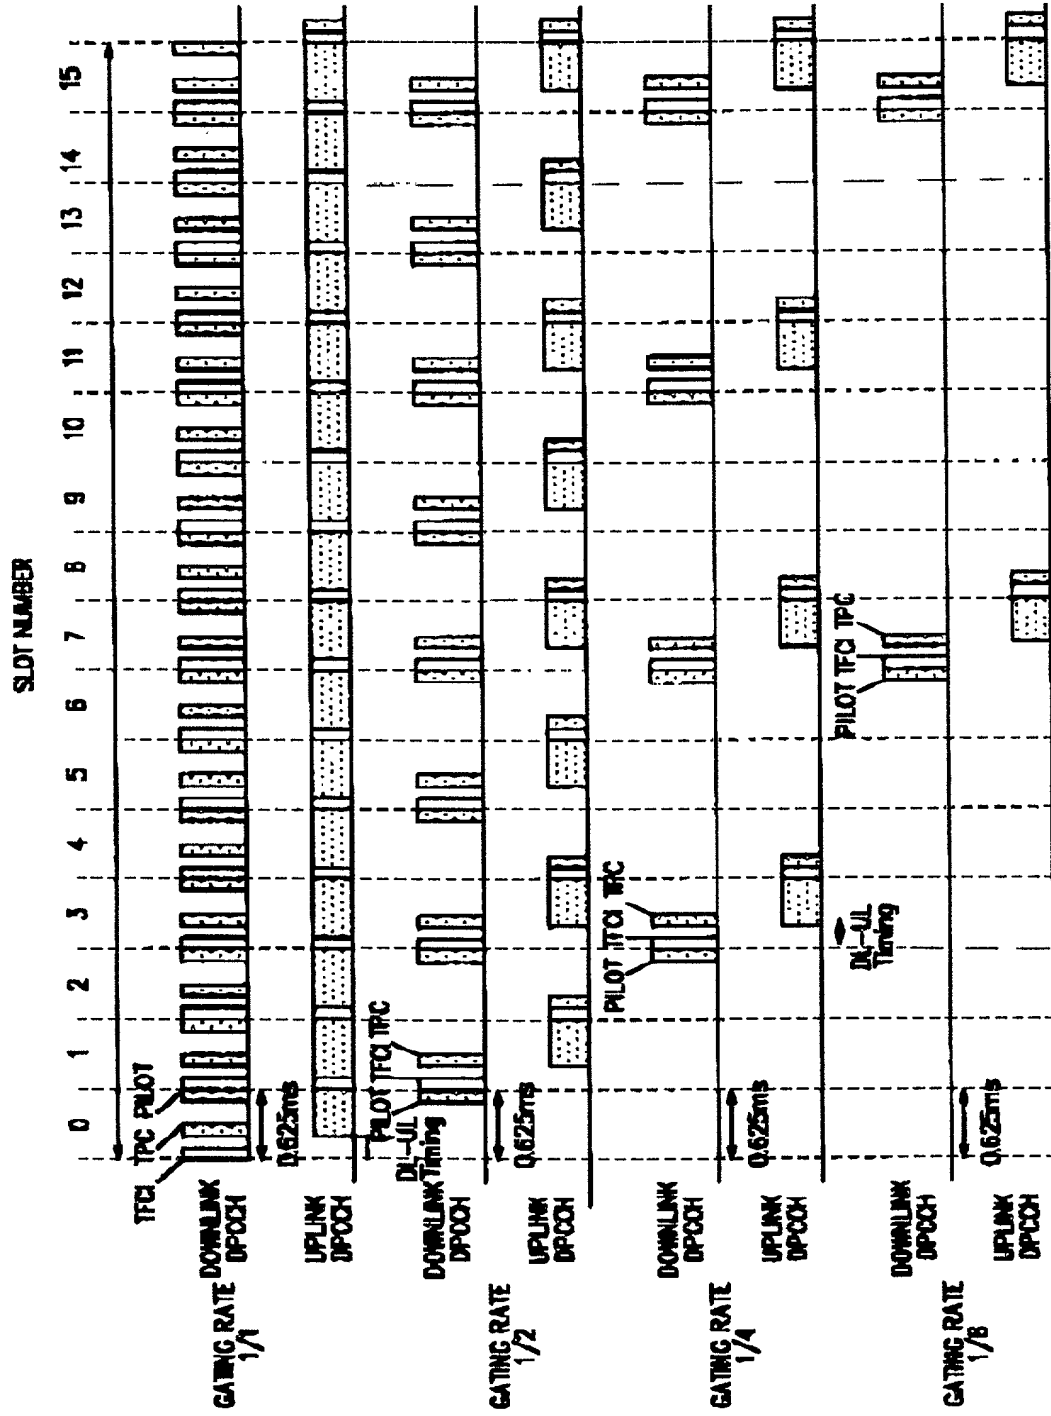


FIG. 10B

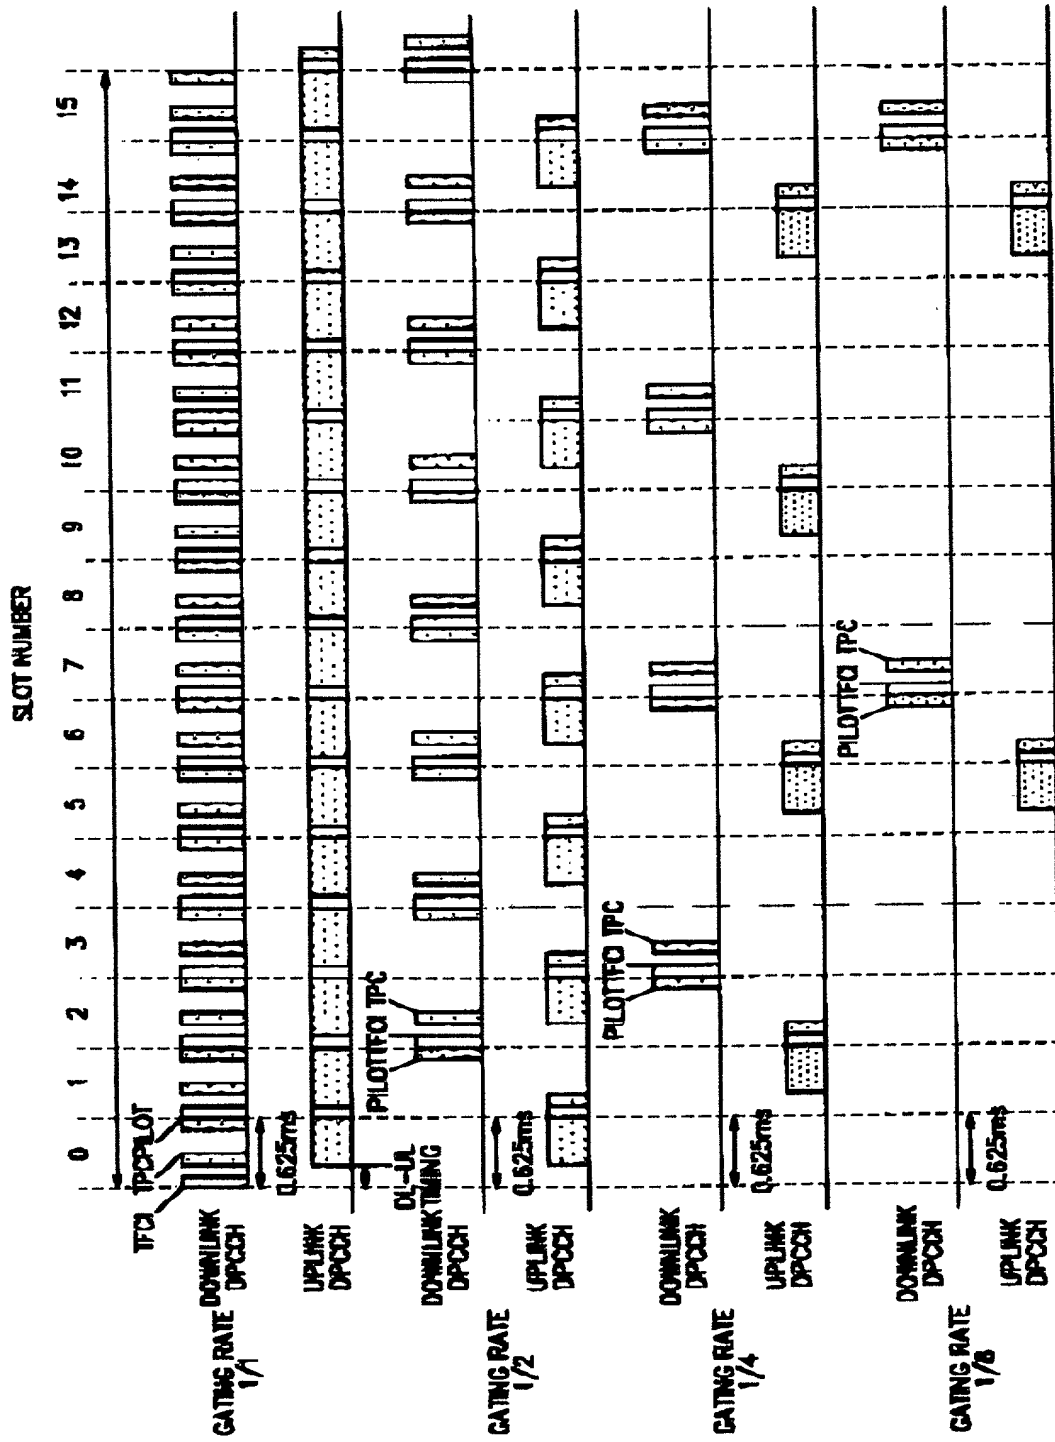


FIG. 10C

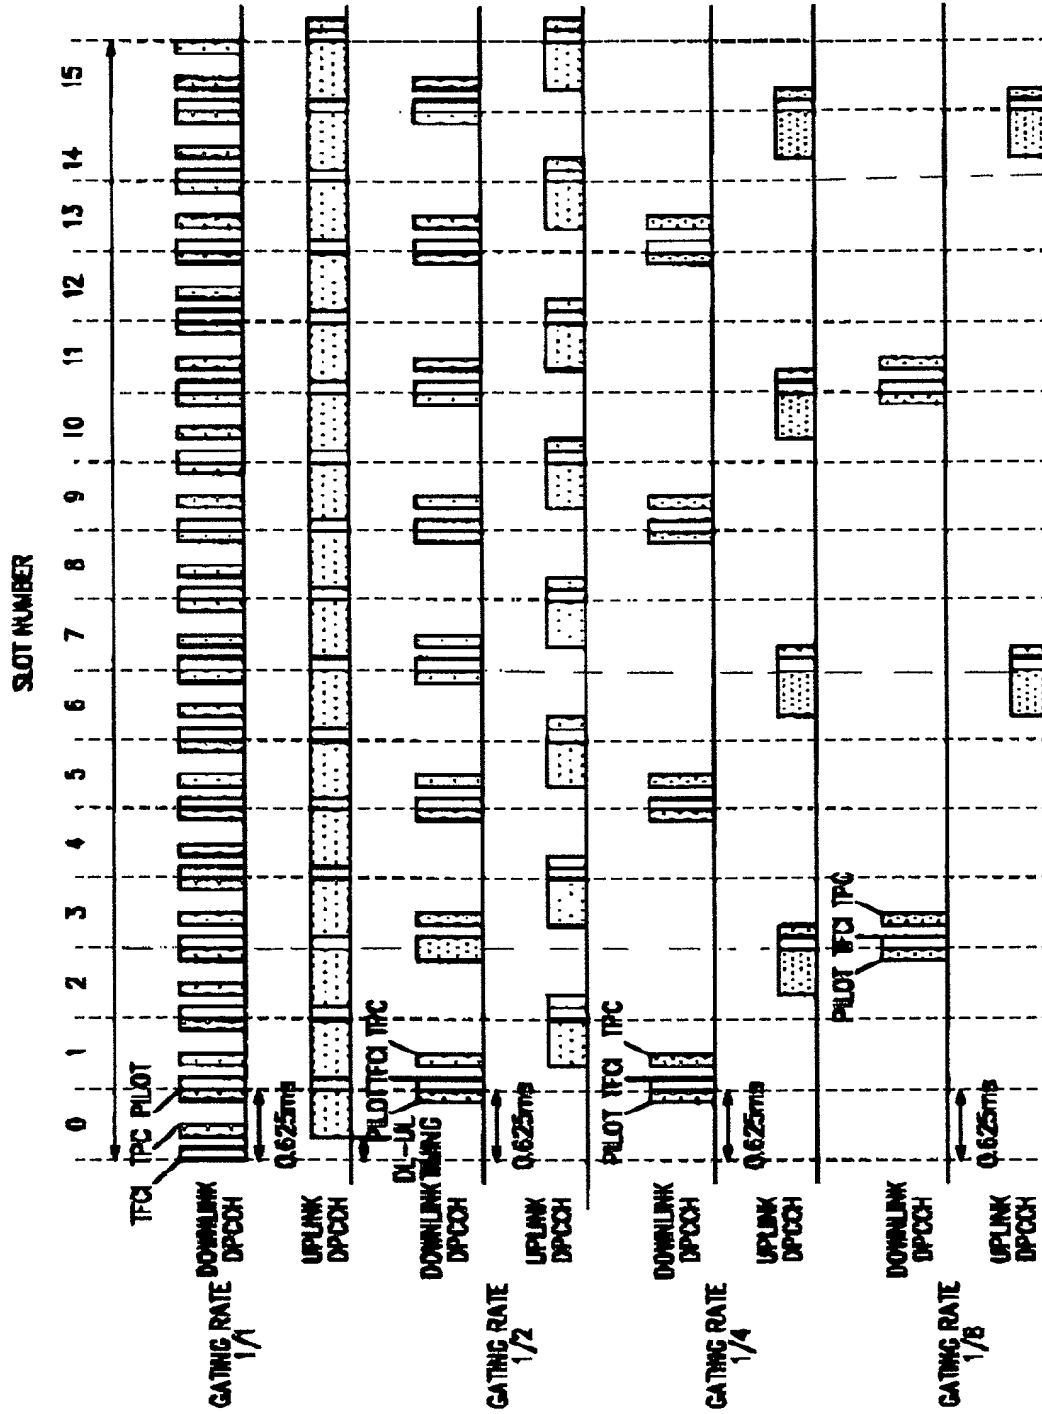


FIG. 10D

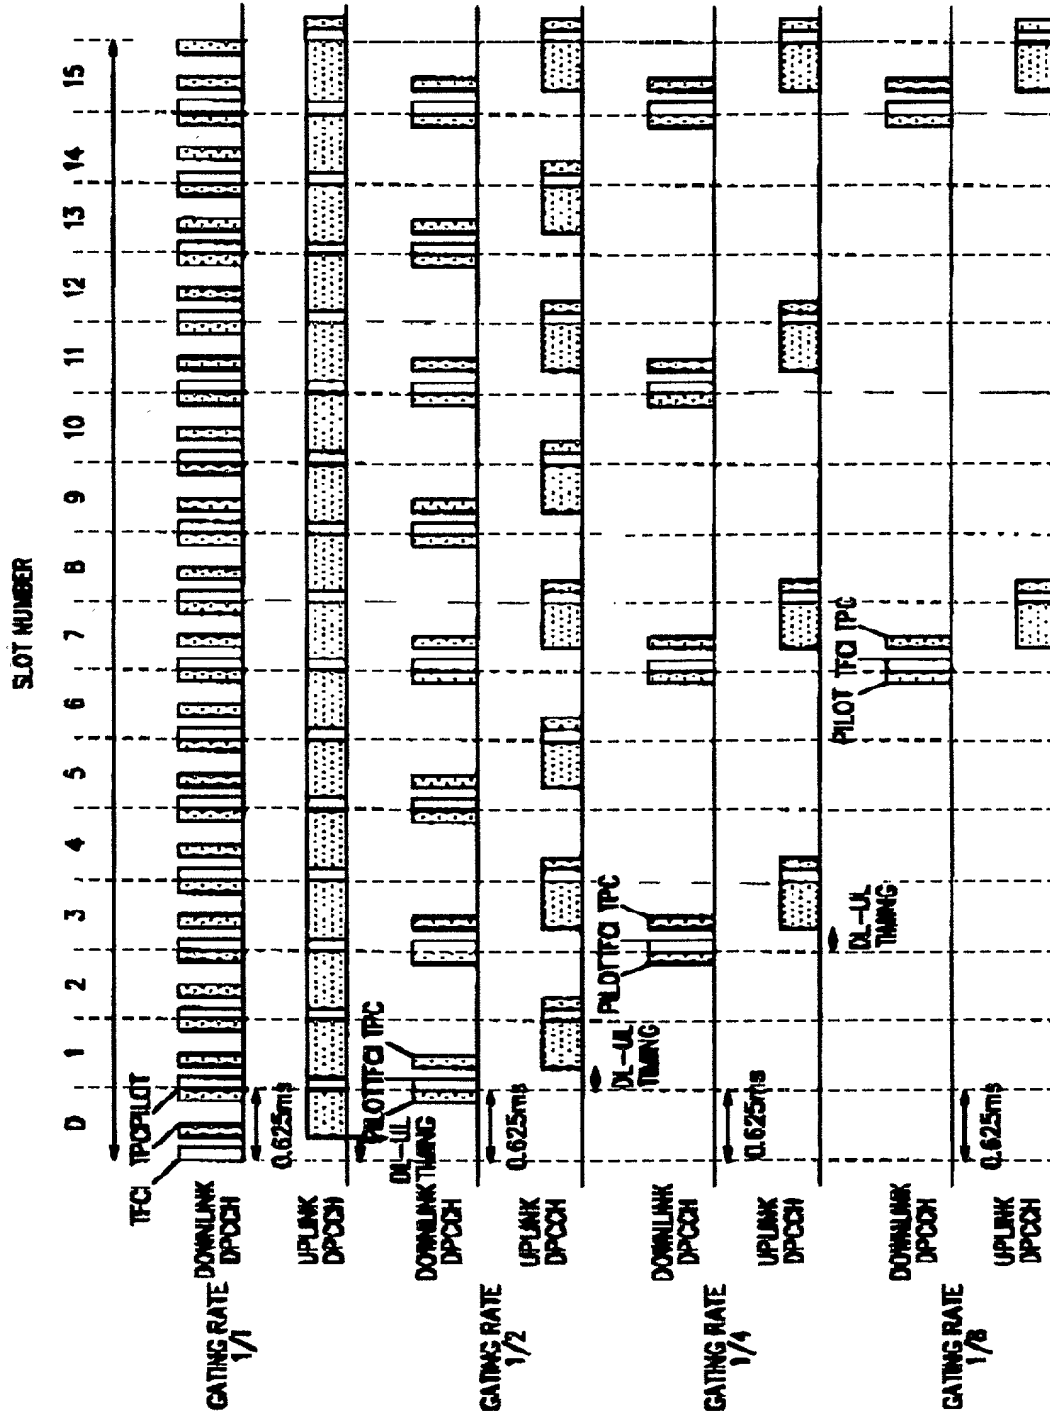


FIG. 10E

FIG. 11A

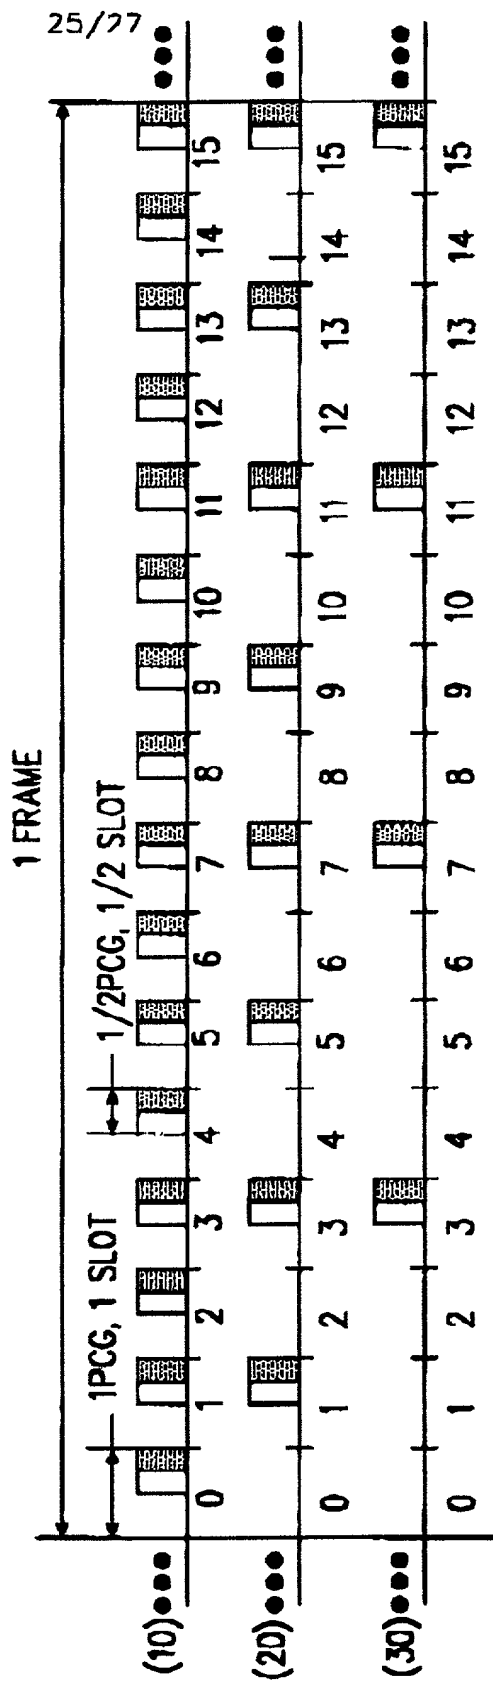


FIG. 11B


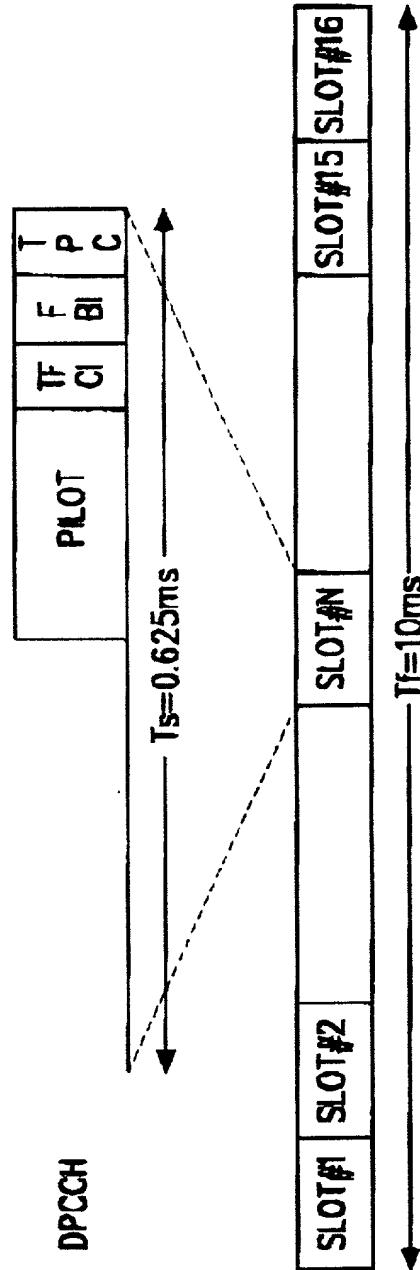


FIG. 11C

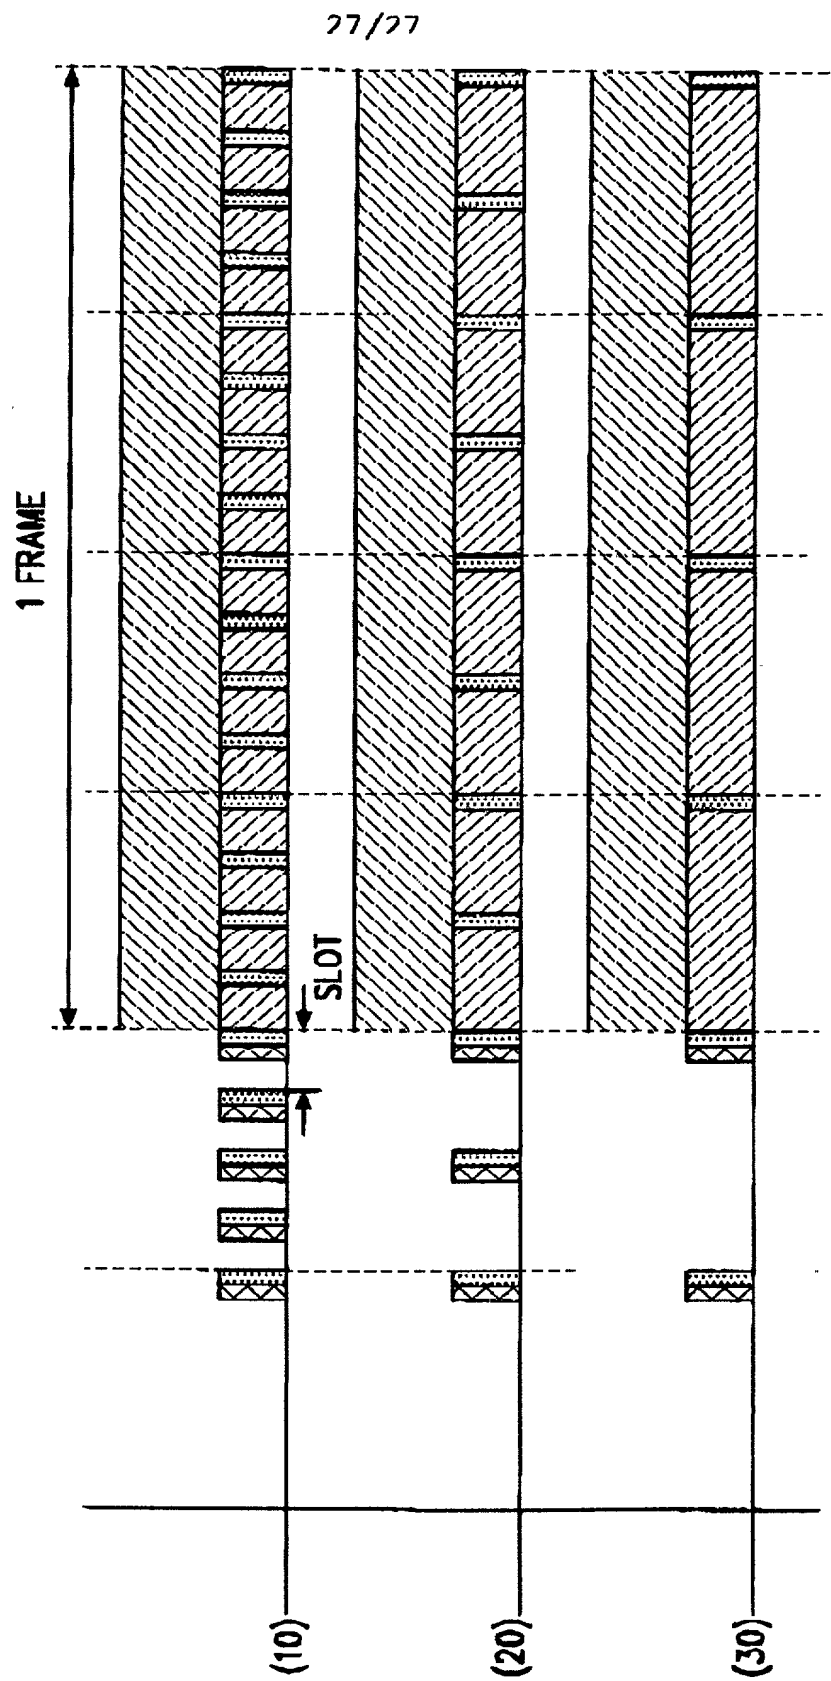

DECLARATION

Docket No. 678-495(P920)

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: APPARATUS AND METHOD FOR GATED TRANSMISSION IN CDMA COMMUNICATION SYSTEM

the specification of which either is attached hereto or indicates an attorney docket no. 678-495(P9204) or:

☐ was filed in the U.S. Patent & Trademark Office on _____ and assigned Serial No. _____.

☐ and (if applicable) was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations §1.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, or §119(a) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>1999-19647</u>	<u>Korea</u>	<u>29/05/1999</u>	Priority Claimed:
(Application Number)	(Country)	(Day/Month/Year filed)	Yes [X] No []
_____	_____	_____	Yes [] No []
(Application Number)	(Country)	(Day/Month/Year filed)	

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)

_____	_____	_____
(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)

I hereby appoint the following attorneys: PETER G. DILWORTH, Reg. No. 28,450; ROCCO R. BARRESE, Reg. No. 25,253; DAVID M. CARTER, Reg. No. 30,849; PAUL J. FARRELL, Reg. No. 33,494; PETER DELUCA, Reg. No. 32,978; JEFFREY S. STEEN, Reg. No. 32,083; ADRIAN T. CALDERONE, Reg. No. 31,746; GEORGE M. KAPLAN, Reg. No. 28,376; JOSEPH W. SCHMIDT, Reg. No. 36,020; RAYMOND E. FARRELL, Reg. No. 34,816; RUSSELL R. KAGGNER, Reg. No. 36,183; CHRISTOPHER G. TRAINOR, Reg. No. 39,517; GEORGE LIKOURFZOS, Reg. No. 40,067; JAMES M. LOEFFLER, Reg. No. 37,873; EDWARD C. MEAGHER, Reg. No. 41,189; SUSAN L. HESS, Reg. No. 37,350; MICHAEL P. DILWORTH, Reg. No. 37,311; PETER B. SORELL, Reg. No. 44,349; and GLENN D. SMITH, Reg. No. 42,156, each of them of DILWORTH & BARRESE, 333 Earle Ovington Boulevard, Uniondale, New York 11553 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation in part, release or re-examination application, with full power of appointment and with full power to substitute an associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Paul J. Farrell, Esq.
DILWORTH & BARRESE
333 Earle Ovington Boulevard
Uniondale, New York 11553
Tel. No.: (516) 228-8484

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Yu-Suk YUN Citizenship Korea

Inventor's signature:  Date: 29 May 2000
Residence & Post Office Address: 954-21, Taechi-dong, Kangnam-gu, Seoul, Korea

FULL NAME OF SECOND JOINT INVENTOR: Soon Young YOON Citizenship Korea

Inventor's signature:  Date: 29 May 2000
Residence & Post Office Address: 165, Karak-dong, Songpa-gu, Seoul, Korea

FULL NAME OF THIRD JOINT INVENTOR: Seung-Ion MAENG Citizenship Korea

Inventor's signature:  Date: 29 May 2000
Residence & Post Office Address: Maehwa-dong #201-1001, Yatap-dong, Puntang-gu, Songnam-shi, Kyonggi-do, Korea

FULL NAME OF FOURTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF FIFTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF SIXTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____